
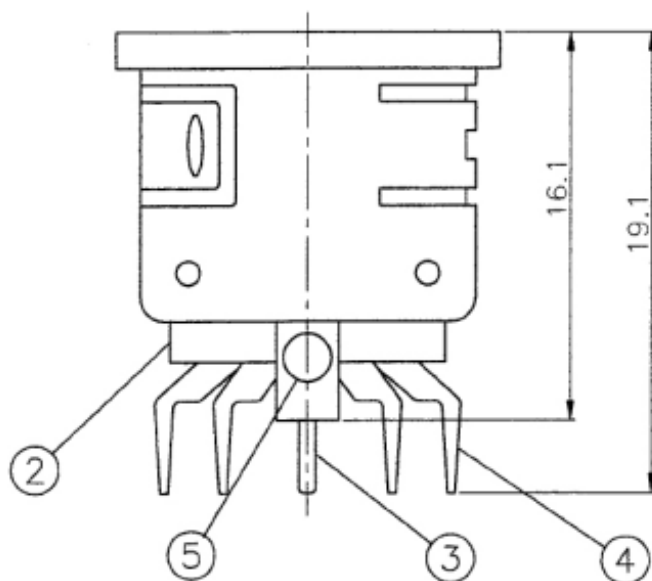
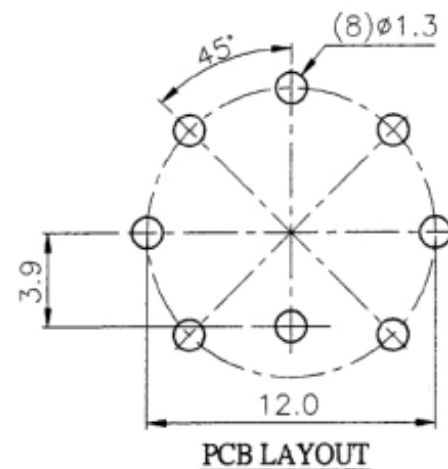


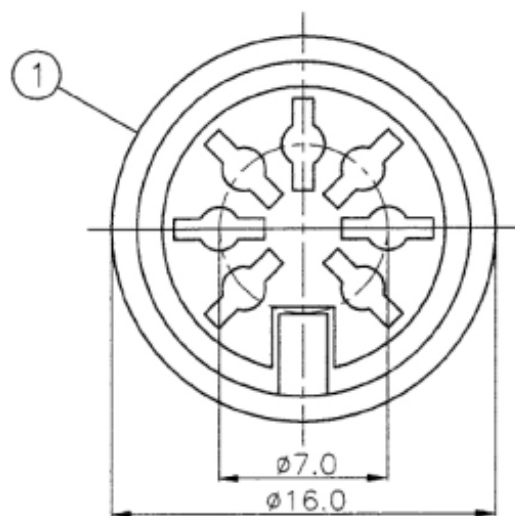

SPECIFICATIONS:

- CONTACT RESISTANCE : 20m OHM MAX.
- INSULATION RESISTANCE : 300M OHM MIN. AT DC 500V.
- VOLTAGE WITHSTANDING : AC 1000V FOR ONE MINUTE.
- INSERTION FORCE : 4.0KG MAX.
- WITHDRAWAL FORCE : 1 - 3.5KG.
- CURRENT RATING : AC: 100V 2A
DC: 20V 1A

5.	RIVET	1	AL	NICKEL PLATED	
4.	CONTACT TERMINAL	7	BSR-H/2 0.7t	TIN	
3.	EARTH TERMINAL	1	PBSR 0.25t	TIN	
2.	INSULATOR	1	P.B.T.		UL94V-0
1.	SOCKET CASE	1	SPCC-SD 0.4t	NICKEL PLATED	
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

DJ-D12S-07-LF

SERIES

05WAY

LEADFREE

SPRING

PCB LAYOUT BIGGEST WIDTH 12.0mm

DIP180°

DESCRIPTION: