

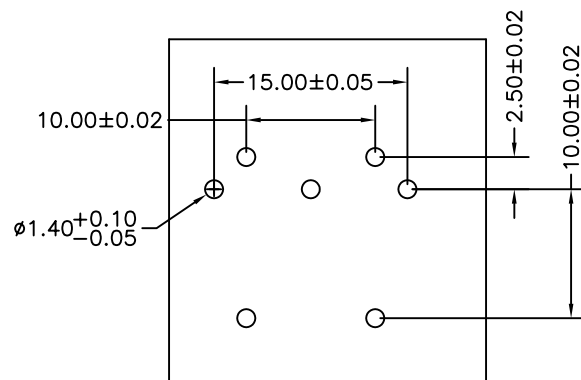
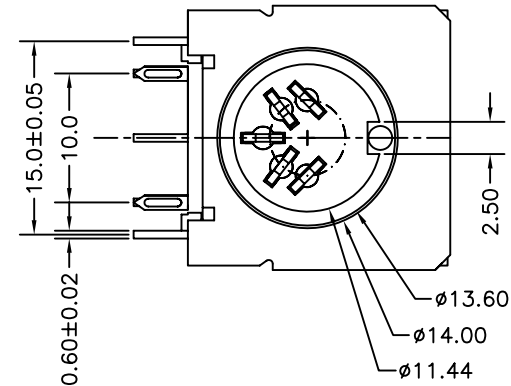



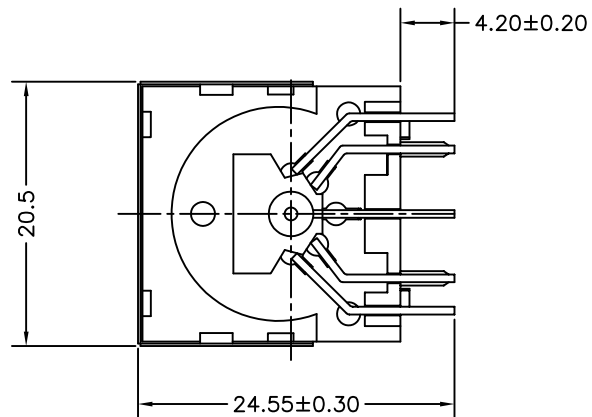

RECOMMEND P.C.BOARD LAYOUT

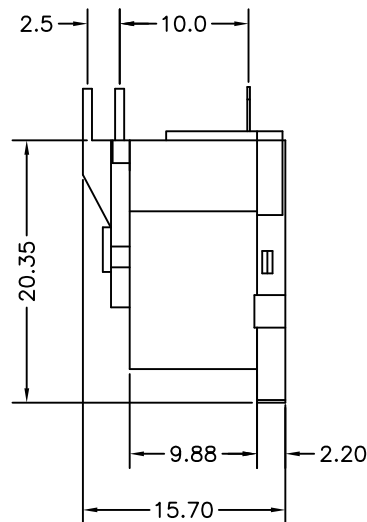

NOTES:

1.MATERIALS

- 1.1 Insulator:PBT 30% Glass Fiber UL-94V-0
- 1.2 Contact: Brass, Tin Plated

2.SPECIFICATIONS

- 2.1 Current Rating: 1Amp
- 2.2 Dielectric Strength: AC 1000V/min.R.M.S.
- 2.3 Insulator Resistance: 5000MΩmin. at 500V DC
- 2.4 Contact Resistance: 8mΩ Max
- 2.5 Operation Temperature: -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DJ-M-05-LF
SERIES | LEADFREE
5P
METAL

DESCRIPTION: 5P黑無孔(端子鍍錫, 底座鍍鎳)