


SPECIFICATIONS:

1. CONTACT RESISTANCE : 20m OHM MAX.
2. INSULATION RESISTANCE : 100M OHM AT 500V D.C.
3. VOLTAGE WITHSTANDING : AC 500V 1 MINUTE .
4. INSERTION FORCE : 5.0KG MAX.
5. WITHDRAWAL FORCE : 1-3.5 KG
6. LIFE TEST : 5,000 CYCLES MIN. AFTER TESTING, CONTACT RESISTANCE SHALL NOT EXCEED 100m OHM .
7. UNLESS OTHER SPECIFIED, TOLERANCE IS ± 0.2 mm.

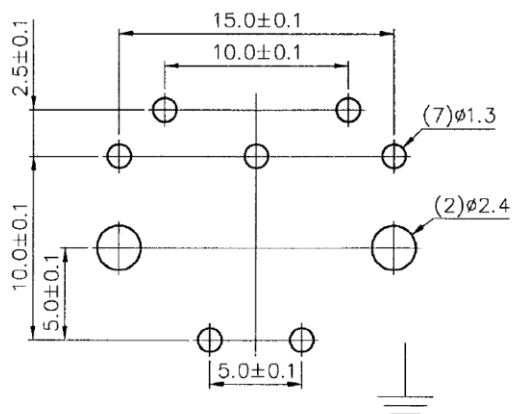

PCB-LAYOUT

6.	SCREW	2	BRASS	NICKEL PLATED	
5.	SPRING	1	PBR-H 0.2t	NICKEL PLATED	
4.	CONTACT TERMINAL	5	BSR-H 0.7t	TIN	
3.	PLATE	1	BAKELITE	PL-PEM 1.4t	
2.	EARTH TERMINAL	1	PBSR-H 0.2t	NICKEL PLATED	
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±


.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION



DESCRIPTION:

煜倫股份有限公司

www.morethanall.com