


- SPECIFICATIONS:**
- CONTACT RESISTANCE : 20m OHM.
 - INSULATION RESISTANCE : DC 500V 100M OHM MIN.
 - VOLTAGE WITHSTANDING : AC 500V 1 MINUTE.
 - INSERTION FORCE : 4KG MAX.
 - WITHDRAWAL FORCE : 1 - 3.5 KG.
 - LIFE TEST : 5,000 CYCLES MIN. AFTER TESTING , CONTACT RESISTANCE SHALL NOT EXCEED 100m OHM.
 - CURRENT RATING : AC : 100V 2A.
DC : 24V 1A.

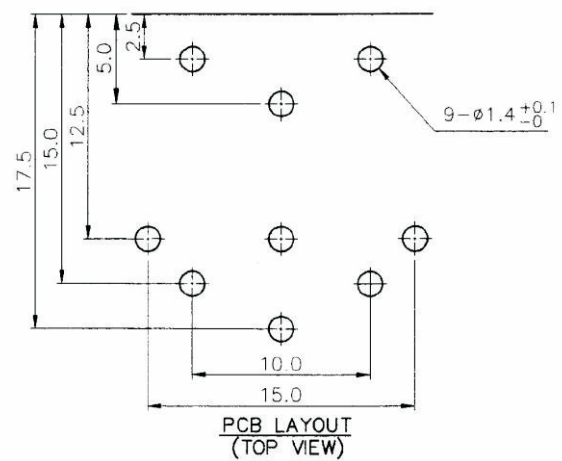


5.	SHIELDING PLATE	1	PBR 0.15t	NICKEL PLATED	
4.	CONTACT TERMINAL	6	BSR-H/2 0.7t	TIN	
3.	EARTH TERMINAL	1	PBSR 0.25t	TIN	
2.	COVER	1	P.B.T		UL94V-0
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant

TOLERANCES ARE
 X.±
 .X±
 .XX±
 .XXX±
 ANG ±

照片框

ORDER INFORMATION

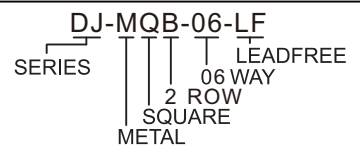

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PROJECTION

DESCRIPTION: