

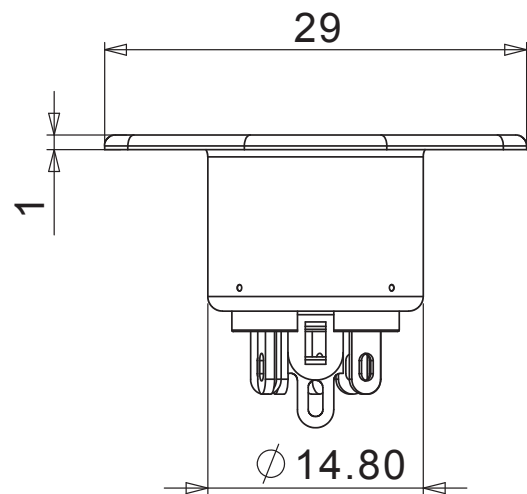
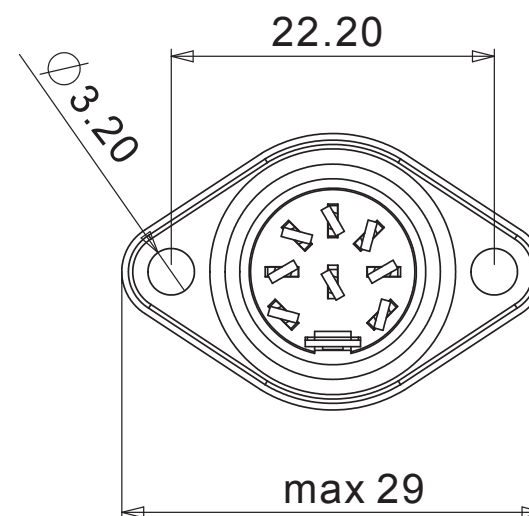


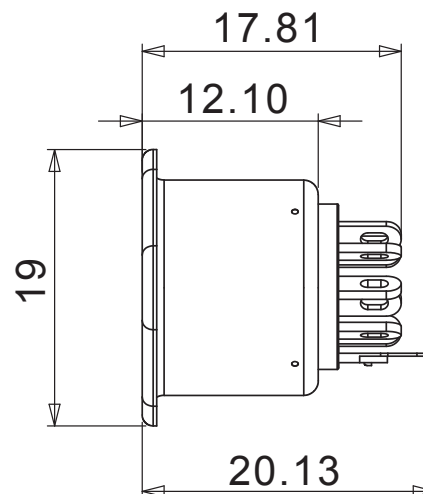

**Insulation Resistance :**  
100 MΩ min. at 250V DC

**Dielectric Strength :**  
250V AC for 1 min.

**Current Capacity :**  
1A 100V AC  
1A 12V DC

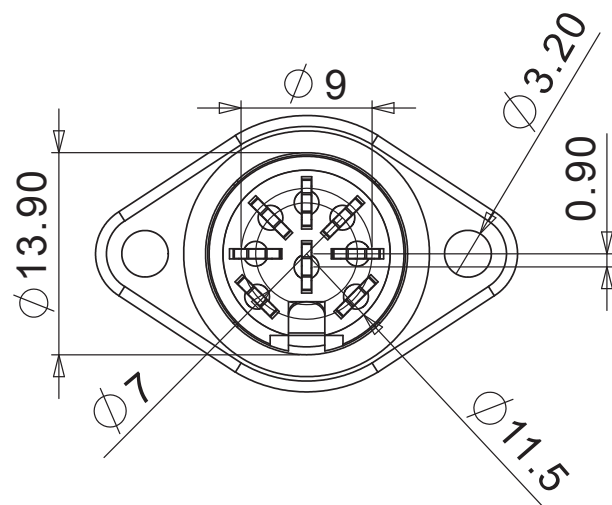

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±  
.X ± 0.25  
.XX ± 0.10  
.XXX ±  
ANG ±

照片框

**ORDER INFORMATION**

DJ-P-08B-LF  
SERIES | 8 PIN B TYPE | LEADFREE  
PANEL

DESCRIPTION: 8PIN 262 DIN SOCKET PANEL MOUNT