




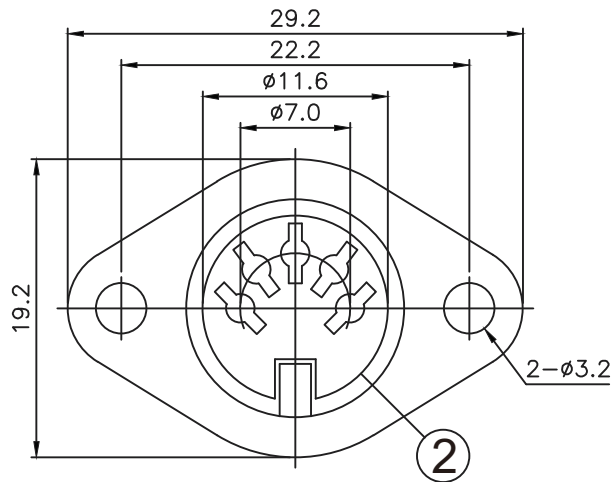

4 PIN

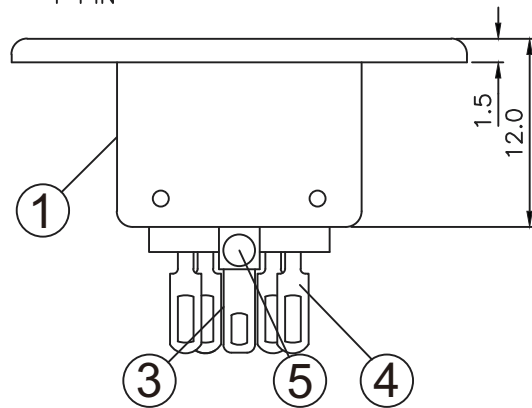

5 PIN~ 8 PIN

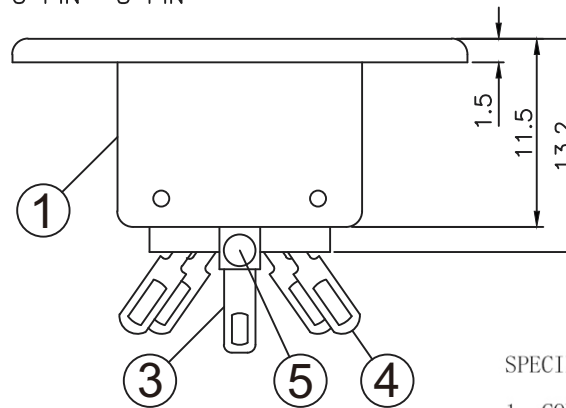

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

ARRANGEMENT OF CONTACTS					
NO OF CONTACTS	4	5	6	7	8
MODEL NO	DJ-P-04	DJ-P-05	DJ-P-06	DJ-P-07	DJ-P-08

5	RIVET	1	AL	Ni PLATED
4	CONTACT TERMINAL	5	C2680 t=0.70	Sn PLATED
3	EARTH TERMINAL	1	C5191 t=0.25	Sn PLATED
2	HOUSING	1	PBT	UL-94V0(BLACK)
1	SOCKET CASE	1	SPCC t=0.40	Ni PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

SPECIFICATIONS:

- CONTACT RESISTANCE : 20m OHM MAX.
- INSULATION RESISTANCE : 300M OHM MIN. AT DC 500V
- VOLTAGE WITHSTANDING : AC 1000V FOR ONE MINUTE.
- INSERTION FORCE : 6.5KG MAX.
- WITHDRAWAL FORCE : 1 - 5.0KG.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DJ-P-xx-LF
SERIES | T LEADFREE
04~08 WAY
PANEL

DESCRIPTION: S JACK