

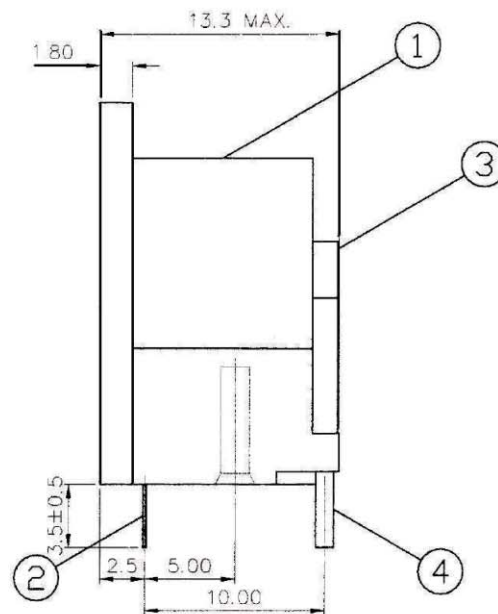


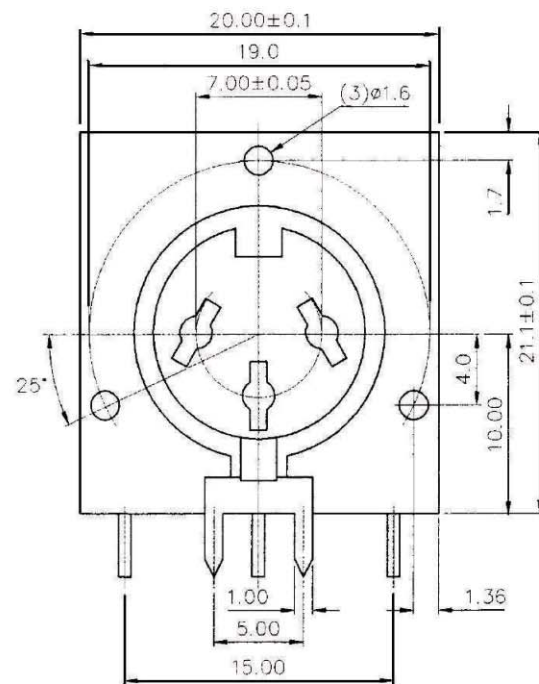

SPECIFICATIONS:

- CONTACT RESISTANCE : 20m OHM MAX.
- INSULATION RESISTANCE : 100M OHM AT 500V D.C.
- VOLTAGE WITHSTANDING : AC 500V 1 MINUTE ,
- INSERTION FORCE : 5.0KG MAX.
- WITHDRAWAL FORCE : 1-3.5 KG
- LIFE TEST : 5,000 CYCLES MIN. AFTER TESTING, CONTACT RESISTANCE SHALL NOT EXCEED 100m OHM .
- CURRENT RATING : AC: 100V 2A
DC: 24V 1A

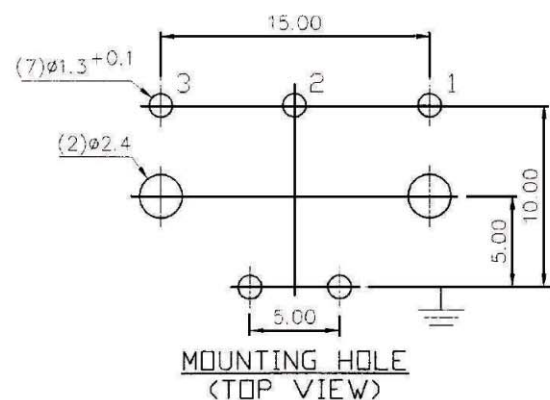

4.	CONTACTOR	3	BSR-H/2 0.7t	TIN	
3.	PLATE	1	BAKELITE	PL-PEM 1.4t	
2.	EARTH TERMINAL	1	PBSR-H 0.2t	TIN	
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


DATE

SIZE A4

SCALE 1:1

X. ±
.X ± 0.20
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

DJ-S5-03-LF
SERIES | LEADFREE
| 03WAY
| 5.0mm
ALL PLASTIC

DESCRIPTION: