

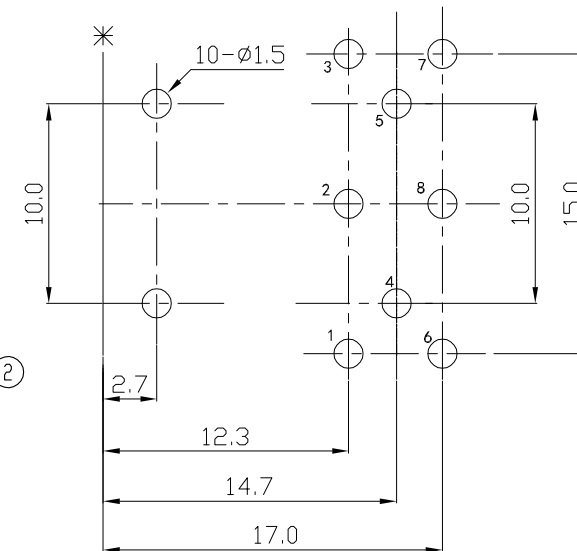
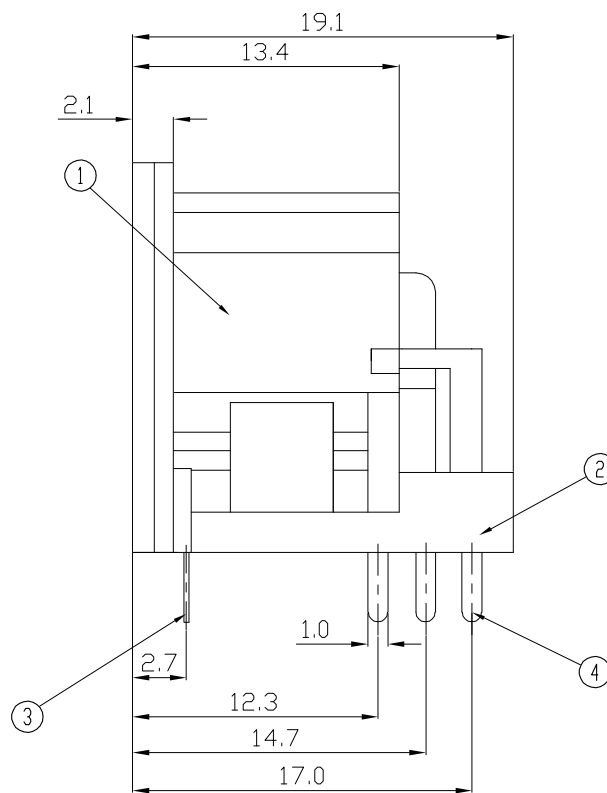


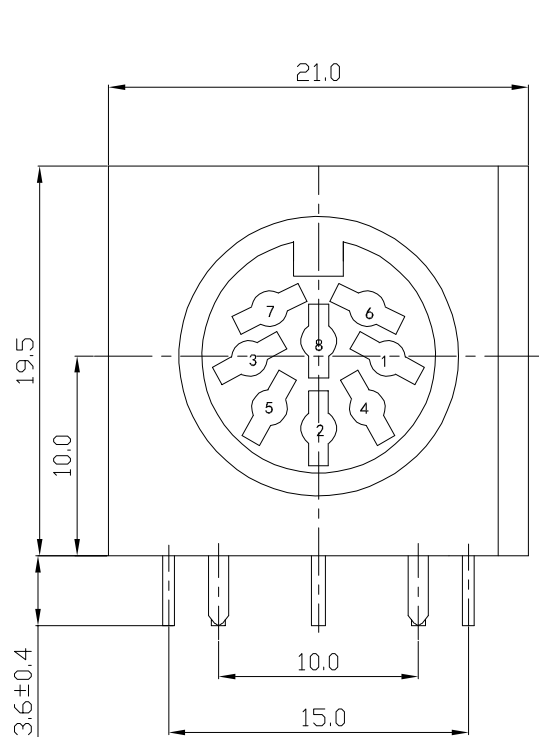

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

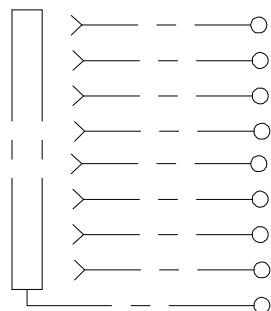

SCHEMATIC DIAGRAM

4	CONTACT FOOT	8	C2680	t=0.7	Ag	PLATED
3	CONTACT FOOT	1	C5191	t=0.25	Ag	PLATED
2	COVER	1	PBT 4815			UL-94V0(BLACK)
1	HOUSING	1	PBT 4815			UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL			REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DJ-SQ-08-LF
SERIES LEADFREE
08 WAY
SQUARE
ALL PLASTIC

DESCRIPTION: DIN JACK

一.塑膠盒

=100pcs/盤

二.內箱

=9*100pcs/盤


=900pcs/盤

三.大箱

=18X100PCS

=1800 PCS

單位:mm

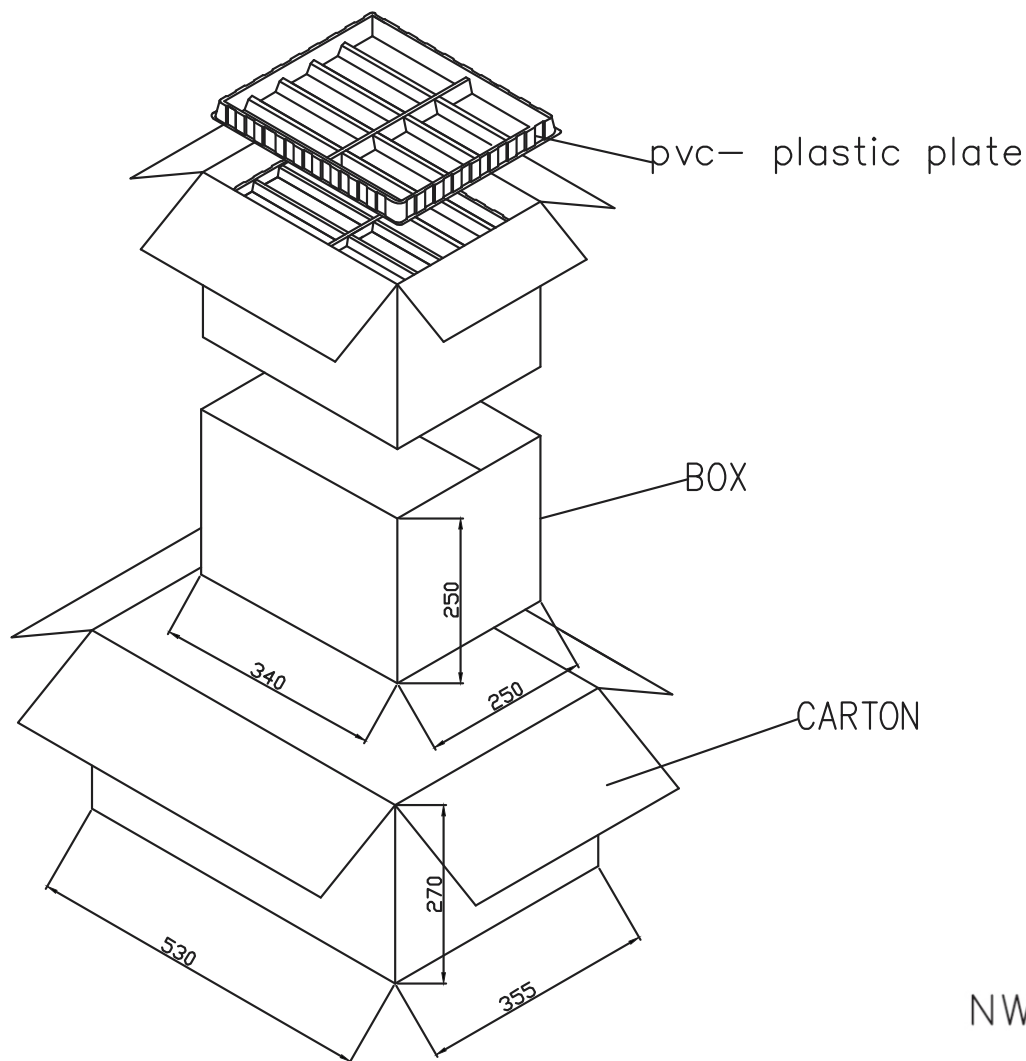

NW:12.3kg

GW:13.3kg

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

DJ-SQ-08-LF
SERIES | LEADFREE
| 08 WAY
| SQUARE
| ALL PLASTIC

DESCRIPTION: DIN JACK