



PIN LAYOUT (TO INSERT PIUG)

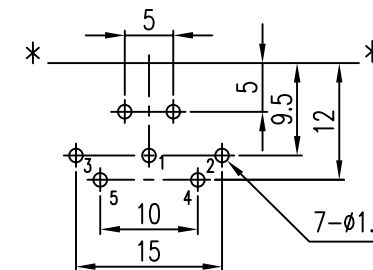

RECOMMEND PCB HOLES LAYOUT

P.C.B Layout Dimension (Tolerance:±0.1)
(Recommend min.Dimension)(bottom view)

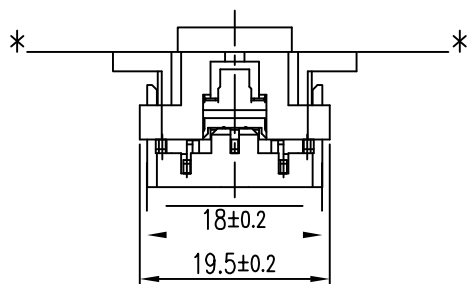

8	TIP SPRING	1	C5210	t=0.2	MBCu-Sn
7	TERMINAL	1	C2680	t=0.7	MBCu-Sn
6	TERMINAL	1	C2680	t=0.7	MBCu-Sn
5	TERMINAL	1	C2680	t=0.7	MBCu-Sn
4	TERMINAL	1	C2680	t=0.7	MBCu-Sn
3	TERMINAL	1	C2680	t=0.7	MBCu-Sn
2	COVER	1	ABS PPO		
1	HOUSING	1	ABS PPO		
LTR	PART NAME	QTY	MATERIAL(THICK,COLOR)		REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

ANGLES: ±5°

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

照片框

ORDER INFORMATION

DJ-SQPE-05-LF
SERIES | LEADFREE
05 WAY
PANEL EAR
SQUARE
ALL PLASTIC

DESCRIPTION: DIN CONNECTOR