

RECOMMENDED DIMENSION FOR HOOD ASSEMBLY

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: STAINLESS STEEL

1.4 SPACER: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.

1.5 LOCK: STAINLESS STEEL

2. FINISH:






2.1 CONTACT:

50u" MIN. NICKEL PLATING OVERALL.

80u" MIN. MATT TIN PLATING ON SOLDER TAIL.

10u" MIN GOLD ON CONTACT AREA.

2.2 SHELL: 20u" MIN. NICKEL PLATING OVERALL

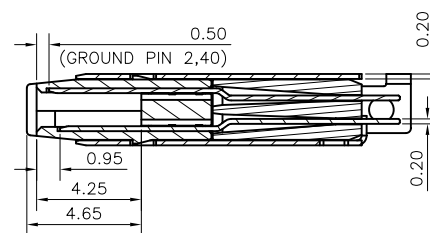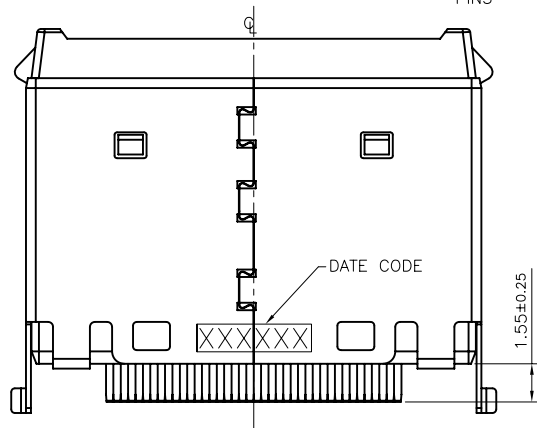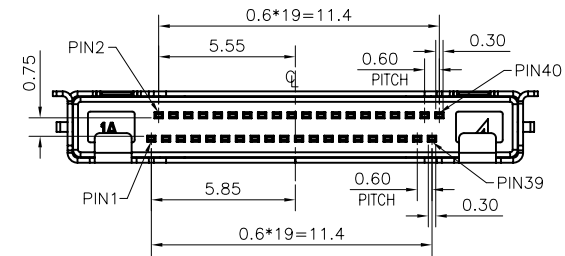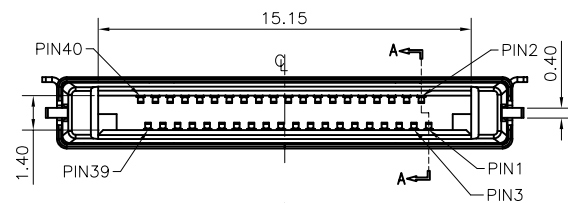

SECTION A-A

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

DATE

SIZE A4

PJECTION

照片框

ORDER INFORMATION

DKG06-PS-040-LF

SERIES

LEADFREE

40 WAY

SOLDER

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.6mm PITCH DOCKING CABLE PLUG CONN.