


适用温度:-25° C~85° C

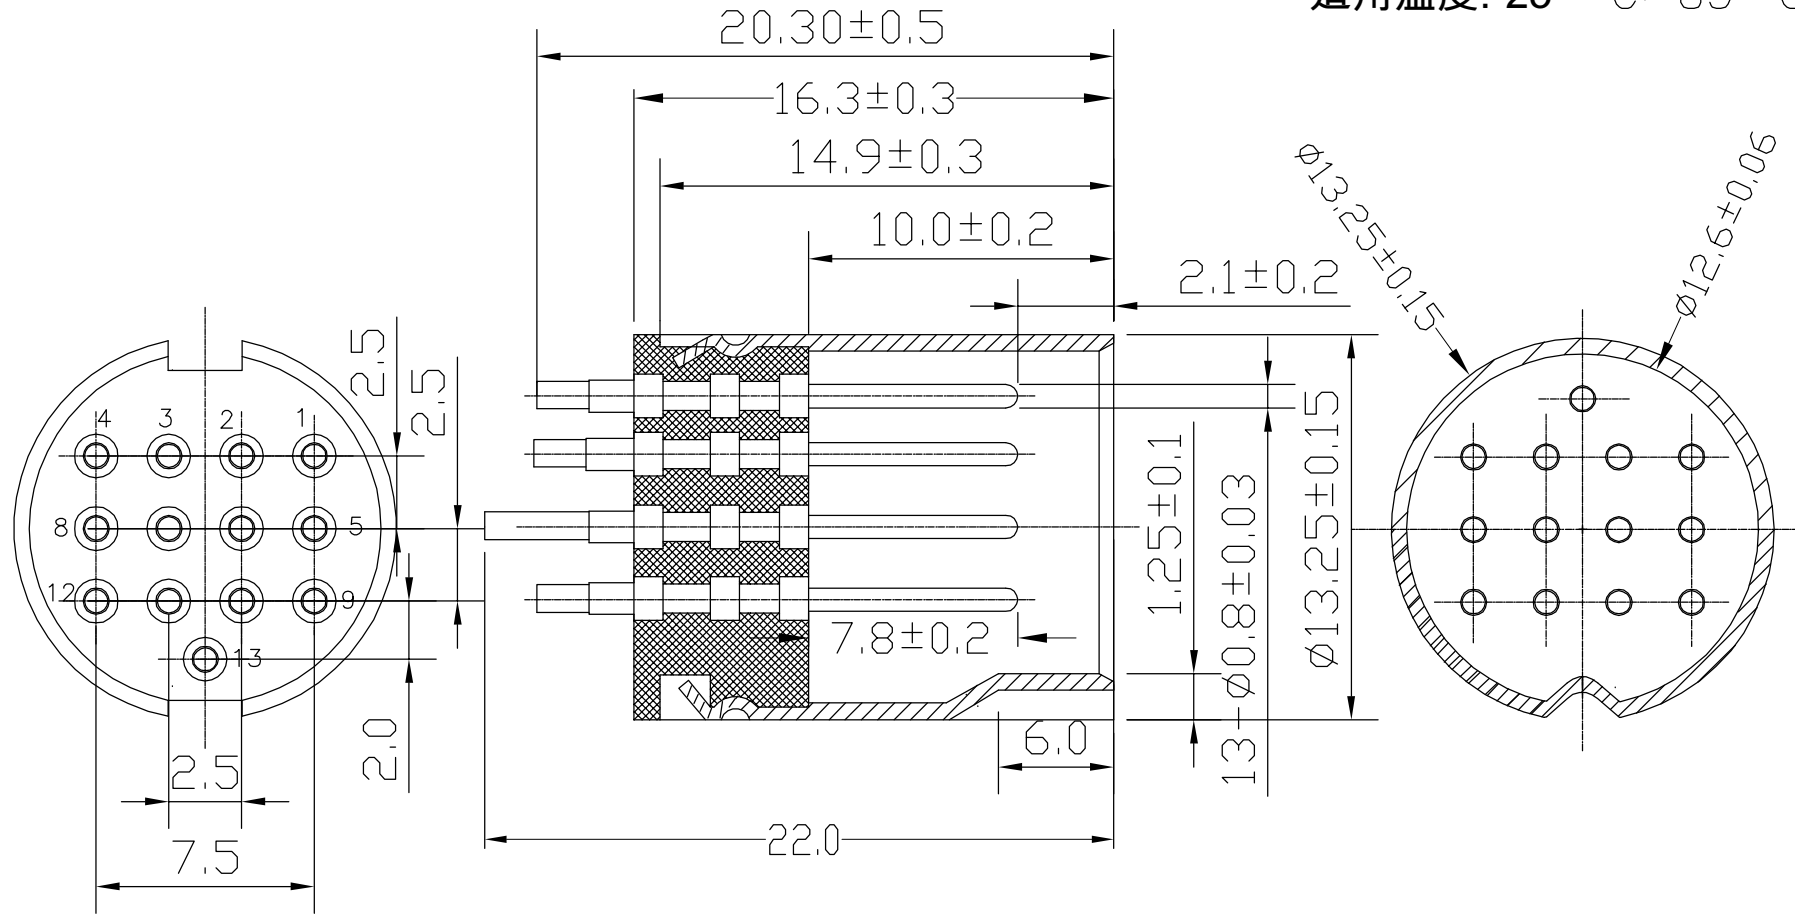

03	Terminal	H59	13	Gold plated within connect area ,	电镀:锡/镍/金
02	Housing	PBT	1	UL94-V0, Color is black PBT	注塑成型
01	Shell	H65	1	Plating nickle or gold overall	电镀:镍/金
序号	品名	材料	用量	备注说明	表面处理

项目	寿命力	插拔力	耐电压	绝缘阻抗	接触阻抗	额定电流	额定电压
大DIN 插头	5000次以上	2.5-4.5 KG	240 V AC	≥1000 mΩ	≤20 mΩ	2 A	12V DC

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

DM-P-13-LF  
SERIES | LEADFREE  
13 WAY  
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DIN 13P 公车针 短管沟深1.25 中间焊杯加长