


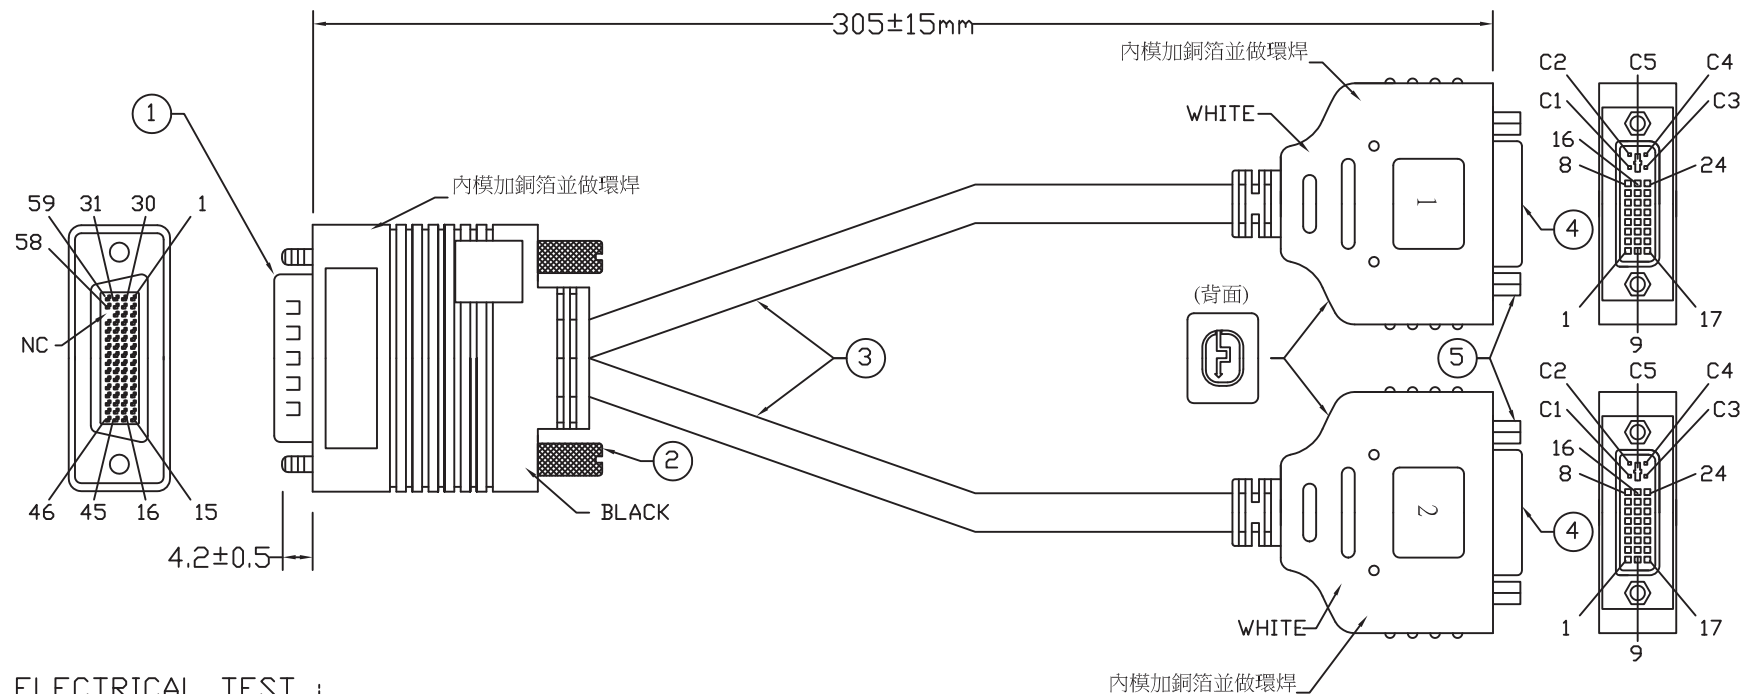

ELECTRICAL TEST :

- 1.OPEN & SHORT TEST.
- 2.CONTACT RESISTANCE: 2Ω (MAX)
- 3.INSULATION RESISTANCE: 20Ω (MIN)
- 4.HI-POT TEST:DC 300V 10ms.

7	MOLDING PVC 45P WHITE		
6	MOLDING PVC 45P BLACK		
5	SCREW NUTS 5.5* ϕ 4.75	4	PCS
4	DVI/F/24+5PIN (FEMALE) CONNECTOR (內模加銅箔) WHITE	2	PCS
3	UL 20276 [(30AWG*1P+D+FAM,100 $\pm$ 10 Ω HM)*4C +(30AWG*1CQAX+S,75 $\pm$ 5 Ω HM)*3C +30AWGT*1P+30AWG*6CJ+AL+B(95%)] ϕ 7.0 $\pm$ 0.2mm COLOR:BLACK	2	PCS
2	#4-40 UNC,NICKEL PLT AED	2	PCS
1	DMS 59PIN (MALE) CONNECTOR (內模加銅箔) BLACK	1	PCS
NO.	DESCRIPTION	Q'YT	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$ 1°

PPOJECTION

照片框

ORDER INFORMATION

DMSDVIX12-592930-E1F-LF


SERIES

LEADFREE
305mm
MALE TO FEMALE
30 AWG
59 TO 29 WAY

DESCRIPTION: DMS 59P(M) to (DVI/F/24+5P F/F *2)

PIN ASSIGNMENT

DVI 1	DMS	DVI 2	DMS
1 (30AWG,WHITE)	26	1 (30AWG,WHITE)	21
2 (30AWG,BROWN)	25	2 (30AWG,BROWN)	20
3 (DRAIN WIRE)	35	3 (DRAIN WIRE)	41
6 (30AWG,ORANGE)	6	6 (30AWG,ORANGE)	10
7 (30AWG,YELLOW)	7	7 (30AWG,YELLOW)	9
8 (30AWG,BROWN)	55	8 (30AWG,BROWN)	51
9 (30AWGT,WHITE)	28	9 (30AWGT,WHITE)	19
10 (30AWG,RED)	27	10 (30AWG,RED)	18
11 (DRAIN WIRE)	34	11 (DRAIN WIRE)	42
14 (30AWG,RED)	5	14 (30AWG,RED)	11
15 (30AWG,WHITE)	54	15 (30AWG,WHITE)	52
16 (30AWG,GRAY)	36	16 (30AWG,GRAY)	40
17 (30AWG,WHITE)	30	17 (30AWG,WHITE)	17
18 (30AWG,GREEN)	29	18 (30AWG,GREEN)	16
19 (DRAIN WIRE)	33	19 (DRAIN WIRE)	43
24 (30AWG,WHITE)	32	24 (30AWG,WHITE)	44
23 (30AWG,BLUE)	31	23 (30AWG,BLUE)	45
22 (DRAIN WIRE)	57	22 (DRAIN WIRE)	49
C1 (COAX,RED)	2	C1 (COAX,RED)	14
C2 (COAX,GREEN)	58	C2 (COAX,GREEN)	47
C3 (COAX,BLUE)	3	C3 (COAX,BLUE)	13
C4 (30AWG,GREEN)	56	C4 (30AWG,GREEN)	50
C5 (SHIELD,3COAX)	1+4+59	C5 (SHIELD,3COAX)	12+15+46
SHELL (BRAID)	SHELL	SHELL (BRAID)	SHELL

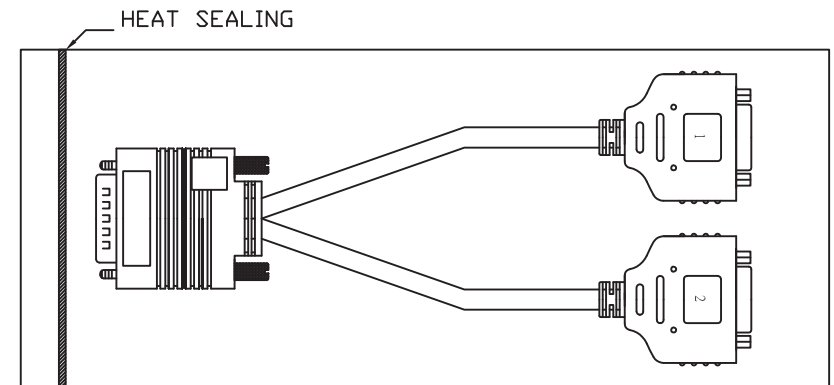

1PCS - 1PE BAG

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

DMSDVIX12-592930-E1F-LF

SERIES

LEADFREE
305mm
MALE TO FEMALE
30 AWG
59 TO 29 WAY

DESCRIPTION: DMS 59P(M) to (DVI/F/24+5P F/F *2)