


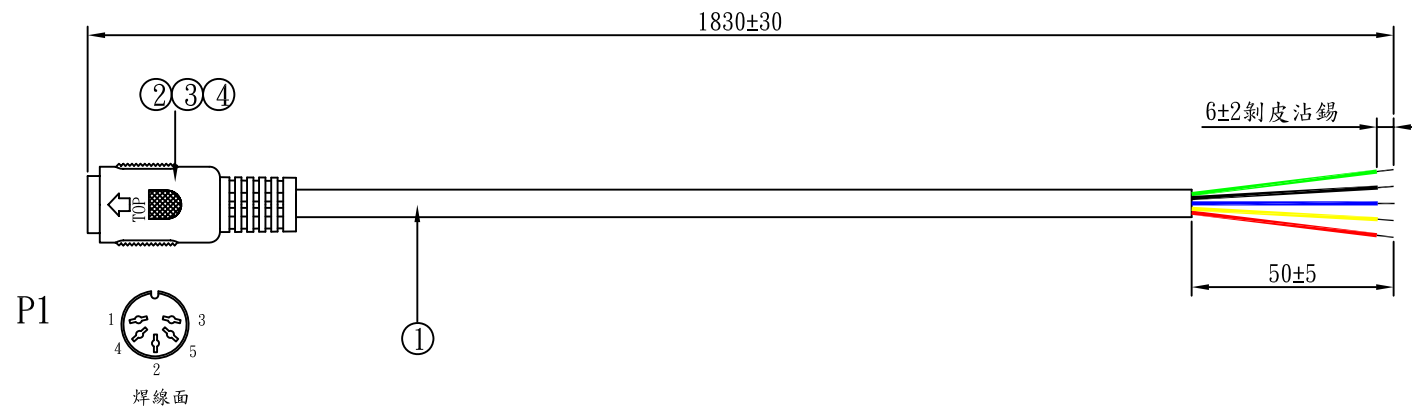

TERMINATION:

P1	COLOR
1	Green
2	White
3	Blue
4	Yellow
5	Red

100% Conducting test

Base on:


1.Insulation impedance:100 MΩ

2.Contact resistance:20 Ω

2.High voltage measuring:300V

Pack:

NO.	SPEC	Q'TY
1	UL 2464 22#5C OD:5.0MM COLOR:BLACK	1PCS
2	DIN 5P/F PBT:BLACK	1PCS
3	MOLDING:PE Transparent white	5g
4	MOLDING:45P PVC Black	10g



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±



照片框

ORDER INFORMATION

DNX1-050022-F6F-LF

SERIES

LEADFREE

1830mm

FEMALE

22 AWG

05 WAY

DESCRIPTION: