


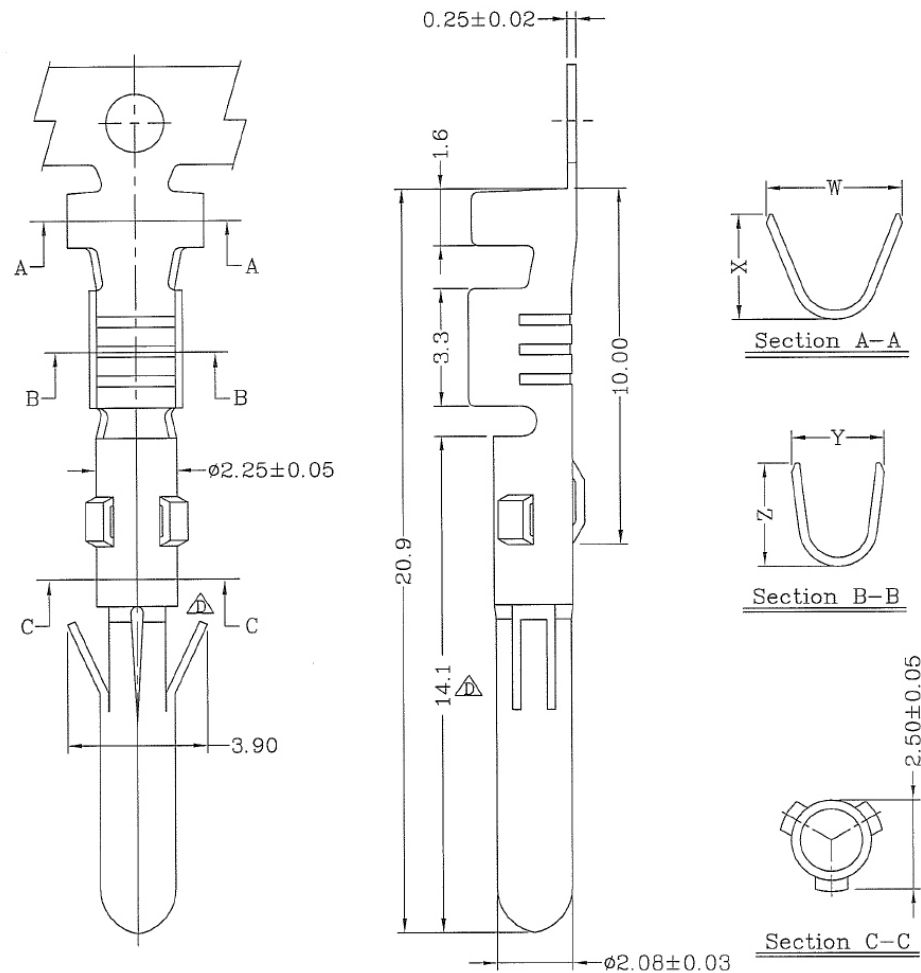

Specifications & Ordering Information:

Part No.	Dimension(mm)				Wire Range	Insulation O.D.	Material	Finish	Qty/reel
	W	X	Y	Z					
DP-M-20	3.8	2.95	2.6	2.90	AWG #20~#24	2.30mm(max)	Brass	Tin-plated	6,000 PCS
DP-M-16	3.9	3.45	3.0	3.30	AWG #16~#20	2.50mm(max)	Brass	Tin-plated	6,000 PCS

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DP-M-xx-LF
SERIES | LEADFREE
16:16~20 AWG
20:20~24 AWG
MALE TERMINAL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION: