
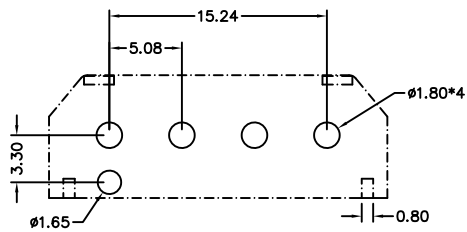


SECTION A-A

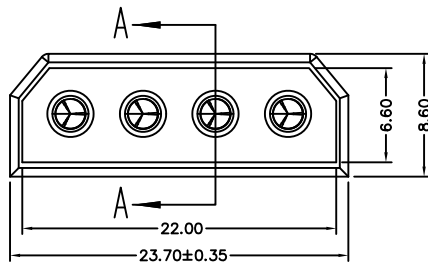

Recommended P.C.B Layout

**MATERIAL**

Insulator : NY66 + 30%G.F UL94-V0  
Contact Pin : Brass

**SPECIFICATION**

Current Rate : 1 AMP  
Insulation Resistance : 5000M $\Omega$ Min.  
Contact Resistance : 20m $\Omega$ Max.  
Dielectric Voltage : AC 500V for one minute  
Operation Temperature : -40°C to + 105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
.X  $\pm$  0.50  
.XX  $\pm$  0.30  
.XXX  $\pm$   
ANG  $\pm$  3°

PJECTION

照片框

**ORDER INFORMATION**

DP-PDP-04-LF  
SERIES | | | LEADFREE  
| | | 04WAY  
| | | POST  
| | | DIP 180°  
| | | MALE

DESCRIPTION: Power 4P 180°C Plastic Post Connector(Column)