
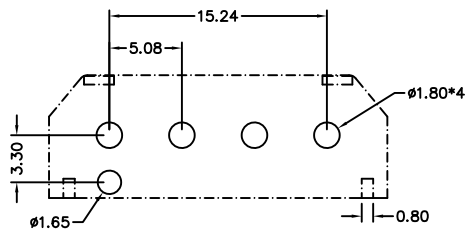


SECTION A-A

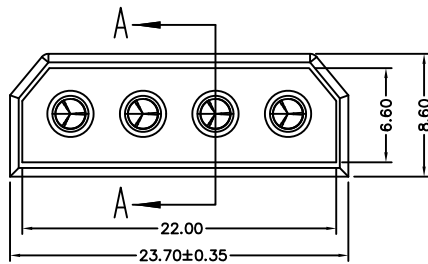

Recommended P.C.B Layout

MATERIAL

Insulator : NY66 + 30%G.F UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000M Ω Min.
Contact Resistance : 20m Ω Max.
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C
Black Insulator

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, \pm
.X \pm 0.50
.XX \pm 0.30
.XXX \pm
ANG \pm 3°

PJECTION

照片框

ORDER INFORMATION

DP-PDPBK-04-LF
SERIES | POST | BLACK | LEADFREE
MALE | DIP 180° | 04WAY

DESCRIPTION: Power 4P 180°C Plastic Post Connector(Column)