
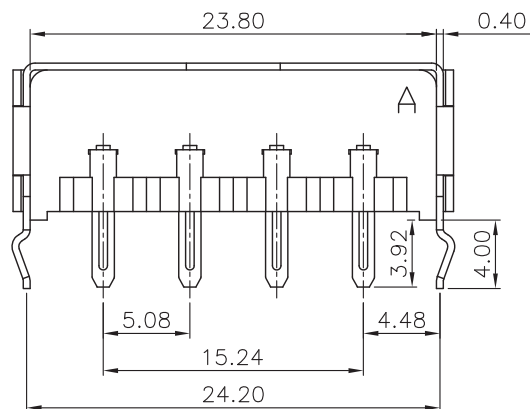


RECOMMENDED PCB LAYOUT

NOTE :

- * Material : Nylon UL 94V-2 (Lead Free)
- * Current rating : 4.5A, AC/DC
- * Voltage rating : 250V AC
- * Finish : Tin-plated over Nickel
- * Split pins
- * $\phi 2.06$ pins available
- * 4 Circuits

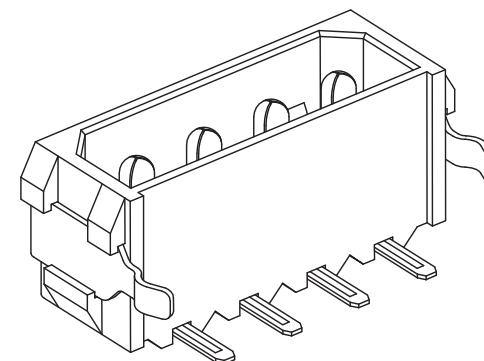

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 2°

PPOJECTION



ORDER INFORMATION

DP-PLMxx-04-LF
SERIES MALE METAL BK:BLACK WH:WHITE
04WAY LEADFREE
LEFT ANGLE

DESCRIPTION: