

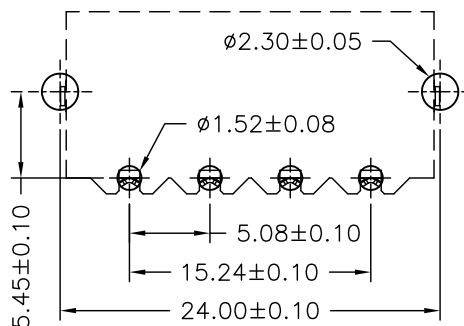
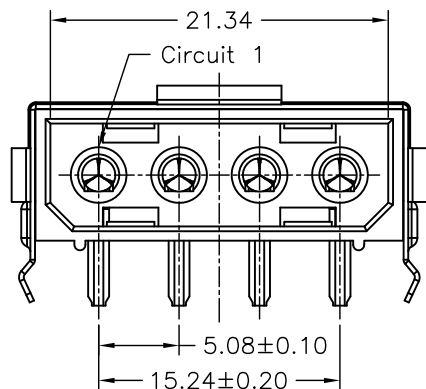
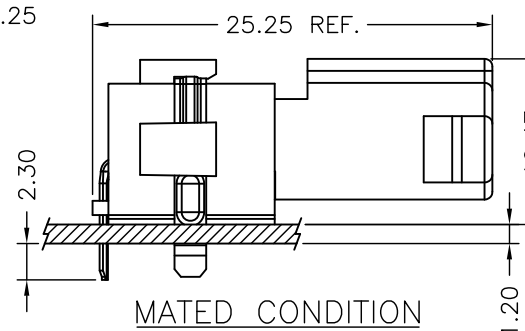




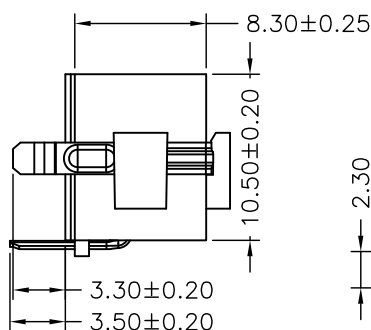


P.C.B. LAYOUT

SPECIFICATIONS
 Current Rating: 10A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Metal Band: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Black)

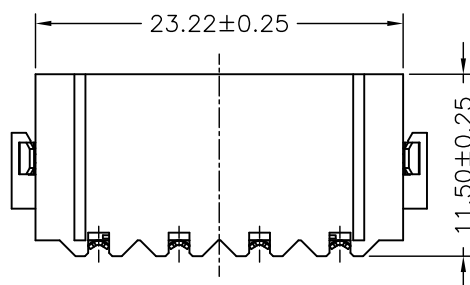

MATED CONDITION

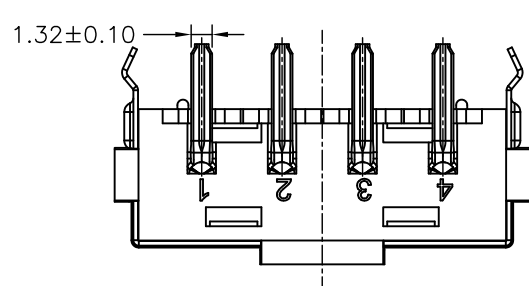

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ±

ORDER INFORMATION

DP-PRMxx-04-LF
 SERIES LEADFREE
 04WAY
 BK:BLACK
 WH:WHITE
 MALE METAL
 DIP 90°

DESCRIPTION: 5.08mm PITCH 90° WAFER