
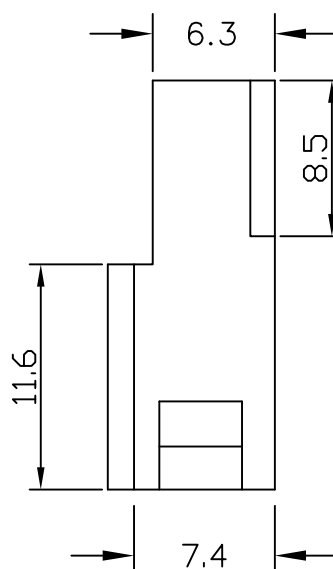
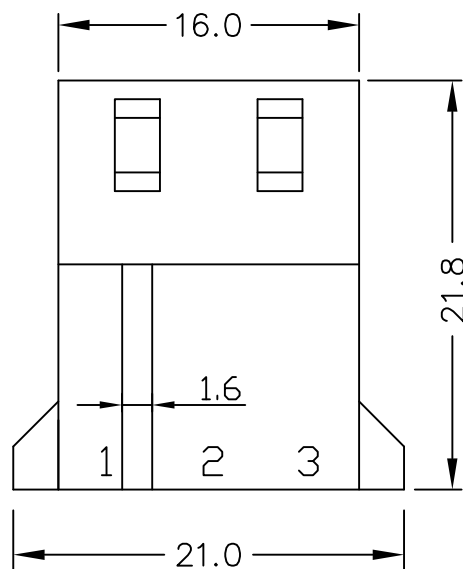


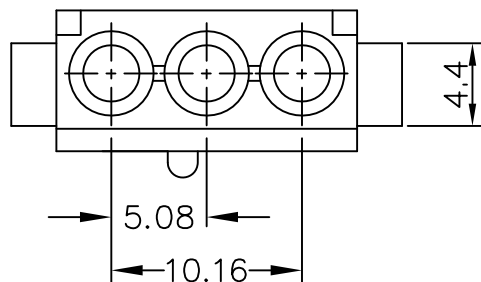

SPECIFICATIONS

Current rating : 5.0A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 10mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 1500V AC/minute

Material : Nylon 66, UL94V-2

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.15
.XXX ±
ANG ±

ORDER INFORMATION

DP-S-03-LF
SERIES | T | LEADFREE
03WAY
FEMALE HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 5.08mm Wire-to-Board Housing