


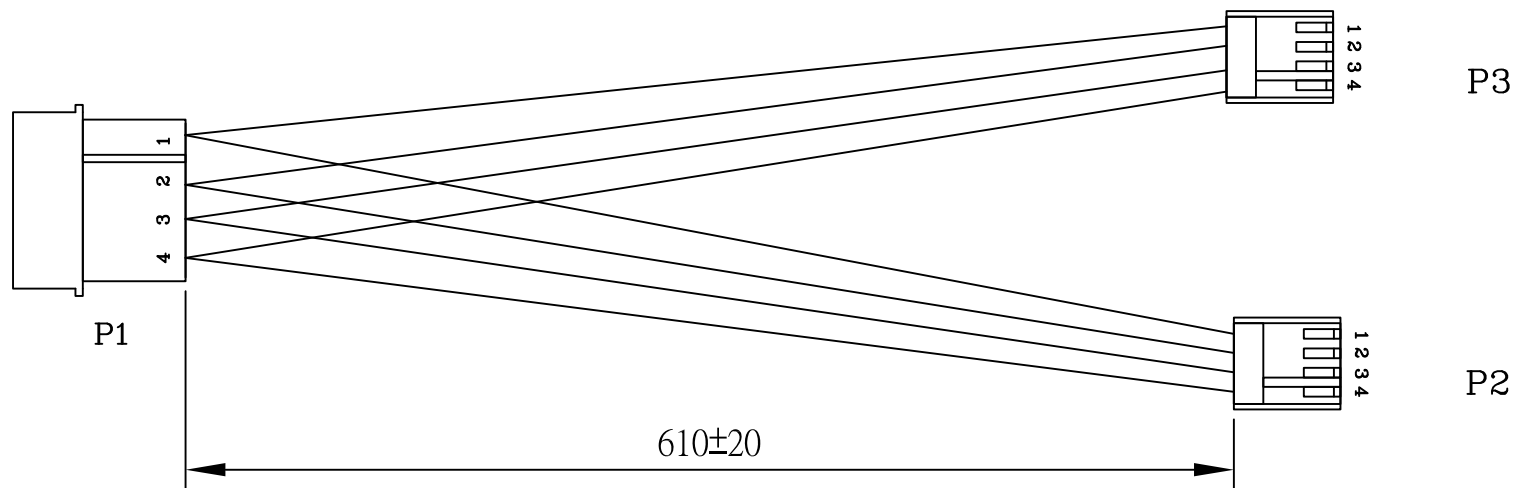

WIRING DIAGRAM

	P1	P2	P3	
YELLOW	1	1	1	YELLOW
BLACK	2	2	2	BLACK
BLACK	3	3	3	BLACK
RED	4	4	4	RED

6	TREMINAL	8	PCS	EI-T-20
5	HOUSING	2	PCS	EI-H-04
4	TREMINAL	4	PCS	DP-M-18
3	HOUSING	1	PCS	DP-P-04
2	CABLE	1	SET	UL1007 24AWG RED/YELLOW/BLACK
1	CABLE	1	SET	UL1007 24AWG RED/YELLOW/BLACK
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DPEIX12-040424-E2F-LF

SERIES

LEADFREE

610mm

MALE TO FEMALE

24 AWG

04 TO 04/04 WAY

DESCRIPTION: DP 5.08-4P/EI 2.5-4P*2 L:610mm