


1. 测试条件:
- a. 电压:300V
 - b. 绝缘电阻:5兆欧
 - c. 导通电阻:2欧姆

WIRING DIAGRAM :

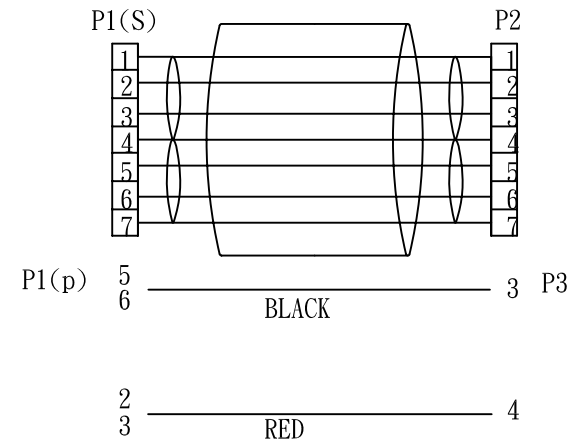

- 1. ALL DIMENSIONS ARE "mm".
- 2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

- 1. 100% OPEN/SHORT TEST
- 2. CONTACT RESISTA
- 3. INSULATION RESISTANCE:5MΩ Min

6	Conn	Serial ATA 7PIN G/F	pcs	1
5	胶料	PVC黑色胶料 45P 环保	G	20
4	Conn	大四P WF	pcs	1
3	Conn	Serial ATA 7+6PIN G/F	pcs	1
2	Cable	UL1007 22# RED *1 BLACK*1	M	0.4
1	Cable	Serial ATA Cable 26AWG 8芯线 Black	M	0.45
ITEM	MAME	DESCRIPTION	UNIT	Q"TY

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DPSA-0407132226-E30C-LF

SERIES

LEADFREE

300mm

MALE TO FEMALE

22/26 AWG

04 TO 07 TO 13 WAY

DESCRIPTION: