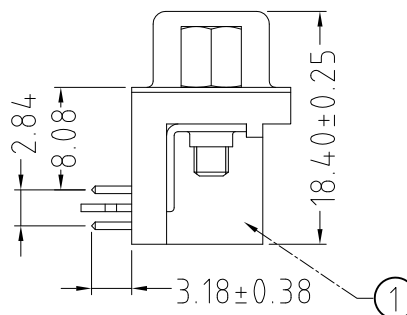
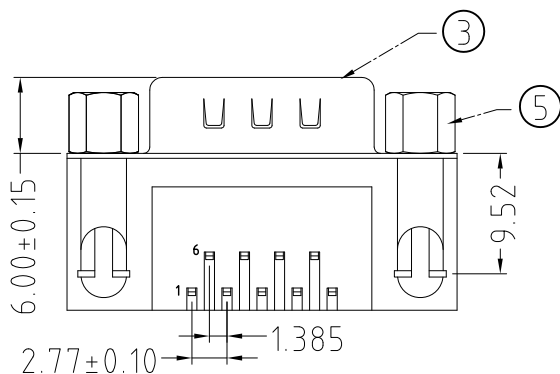
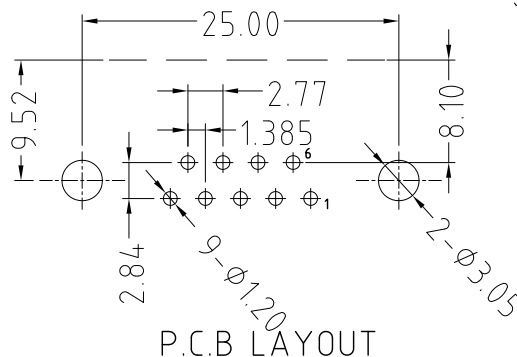
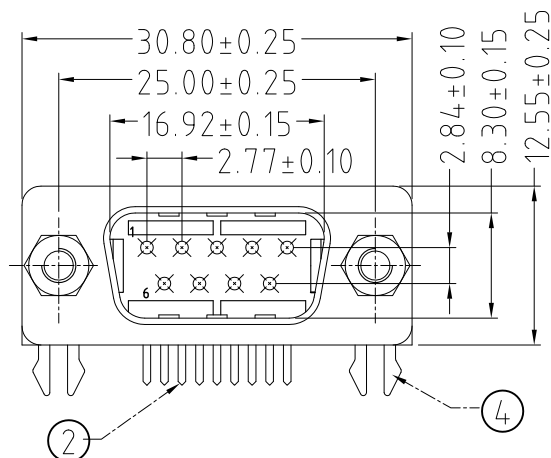


Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Mating force: 5.5 Kgf Max.
6. Unmating force: 1.7 Kgf Min.
7. Temperature range: -55°C~+105°C

5	Screw	2	Brass	4.75*11.80mm	80u"min. Nickel Plated
4	"Z" type board-lock	2	Brass	T=0.50mm	80u"min. Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.40mm	80u"min. Nickel Plated
2	Contact	9	Brass	T=0.20mm	Contact area: 0.8u" Gold Plated over 40u" Nickel min. Solder area: 80~120u"min. Tin Plated over 40u" Nickel min. OR All 0.8u" Gold Plated over 40u" Nickel min.
1	Housing	2	P.B.T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ± 0.02
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DR-PG-09-LF
SERIES | LEADFREE
09 WAY
FULL GOLD
MALE

DESCRIPTION: D-SUB RIGHT ANGLE P.C.B TYPE 9PIN(M)插鎖