
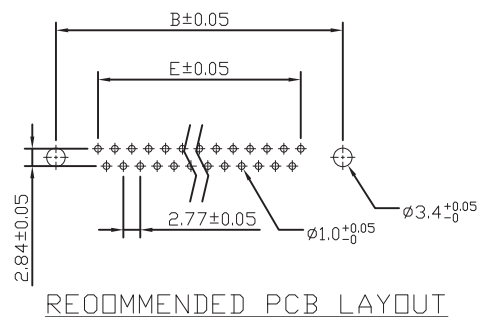


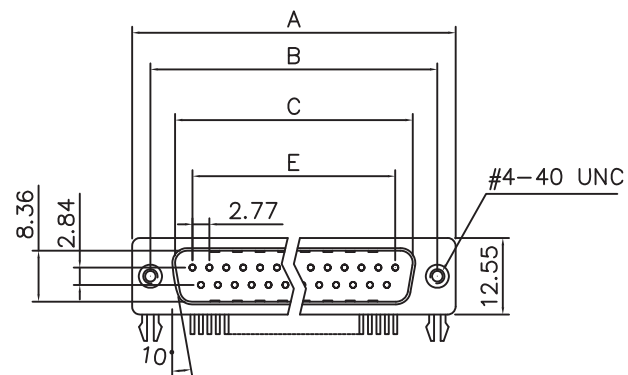

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT,UL94V-0

Contact : Copper alloy

Shell : Steel, 60u" Nickel Over 50u" min Copper

Clinch Nut : Copper alloy, Nickel Plated

Boardlock : Steel, Tin Plated.

Electrical



Contact Resistance : 20 milliohms

Insulation Resistance : 1000
megohms at 500 VDC

Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Volatge Rating : 250 VAC/rms 60Hz

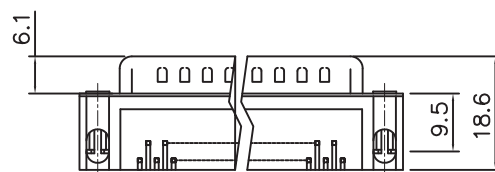

7.2mm Footprint

Dimensions

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DR-PGN-xx-LF
SERIES
LEADFREE
09~37 WAY
NUT
FULL GOLD
MALE

DESCRIPTION: