
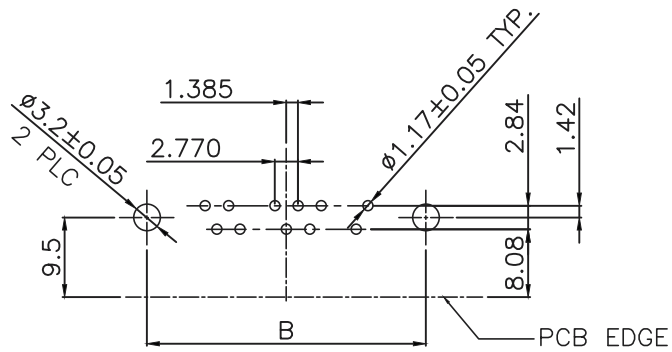

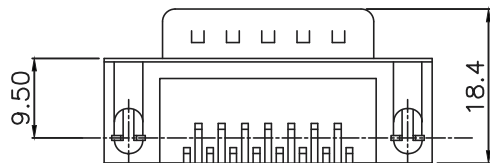



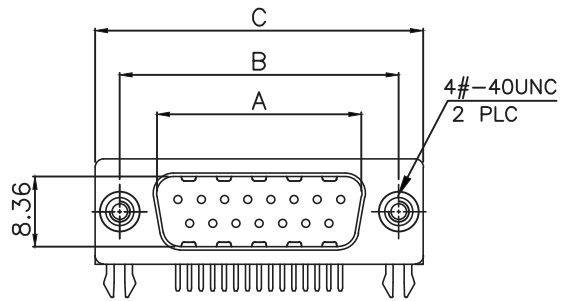

Recommend P.C.B Layout

1. Specification:

Contact Current Rating: 3Amperes.
Dielectric Withstanding Voltage: AC 500V at sea level.
Insulation Resistance: 1000 Megohms Min.
Contact Resistance: 30Milliohms Max.
Operation Temperature : -55°C to +105°C.

2. Material

Contact :Copper Alloy.
Insulator: PBT
Shell: SPCC.
Z-Piece: Copper Alloy.
Screw: Iron.
Rivet: Copper Alloy.

No	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

DR-PGNH-xx-LF
SERIES | | | | LEADFREE
09-37WAY
MALE | NUT | HEX SCREW
FULL GOLD

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com