

MATERIAL:

INSULATOR : PBT+30% GLASS FIBER (UL 94V-0),BLACK.

CONTACT MATERIAL : BRASS.

CONTACT FINISH : GOLD OVER NICKEL.

SHELL FINISH : STEEL NICKEL PLATED.

SPECIFICATION:


CURRENT RATING : 5 AMP

DIELECTRIC WITHSTANDING VOLTAGE : 1000V PER MINUTE.

INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.

CONTACT RESISTANCE : 15m Ω MAX. 10 SEC.

OPERATING TEMPERATURE : -55°C ~ +105°C.

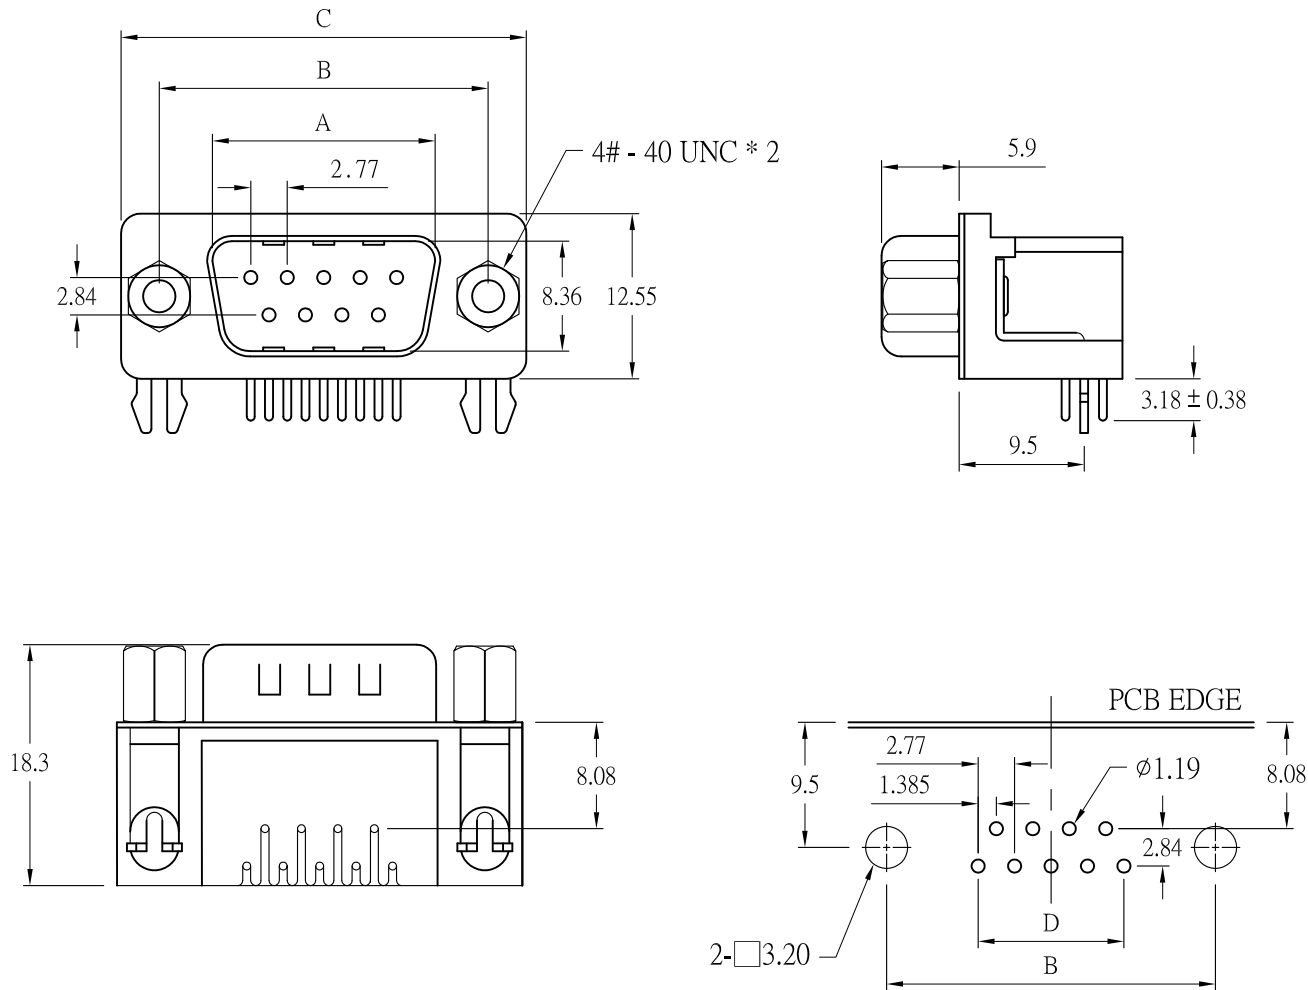

SHELL SIZE	Dim A ± 0.20	Dim B ± 0.25	Dim C ± 0.38	Dim D
09 pin	16.92	24.99	30.80	11.08
15 pin	25.25	33.32	39.10	19.39
25 pin	38.96	47.04	53.00	33.24
37 pin	55.42	63.50	69.32	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

DR-PSJ-xx-LF
SERIES | LEADFREE
09~37 WAY
JACKSCRW
SEMI GOLD
MALE

DESCRIPTION: D-SUB CONN. RIGHT ANGLE , MALE FOOTPRINT : 8.08mm