

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0.

SANDARD : PBT.

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD OVER NICKEL.

SHELL : STEEL.

BOARDLOCK : STEEL, TIN PLATED.

RIVETED INSERT : BRASS, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 5 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 15mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C.

POSITION	A ± 0.25	B ± 0.25	C ± 0.38	D
09 PIN	16.90	25.00	30.80	11.08
15 PIN	25.25	33.30	39.20	19.39
25 PIN	38.95	47.05	53.05	33.24
37 PIN	55.40	63.50	69.40	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

照片框



ORDER INFORMATION

DR-PSNH-xx-LF
SERIES | NUT | SEMI GOLD | MALE
LEADFREE
09~37 WAY
HEX SCREW

DESCRIPTION: D-SUB CONN RIGHT ANGLE , MALE FOOTPRINT : 8.08mm

煜倫股份有限公司

www.morethanall.com

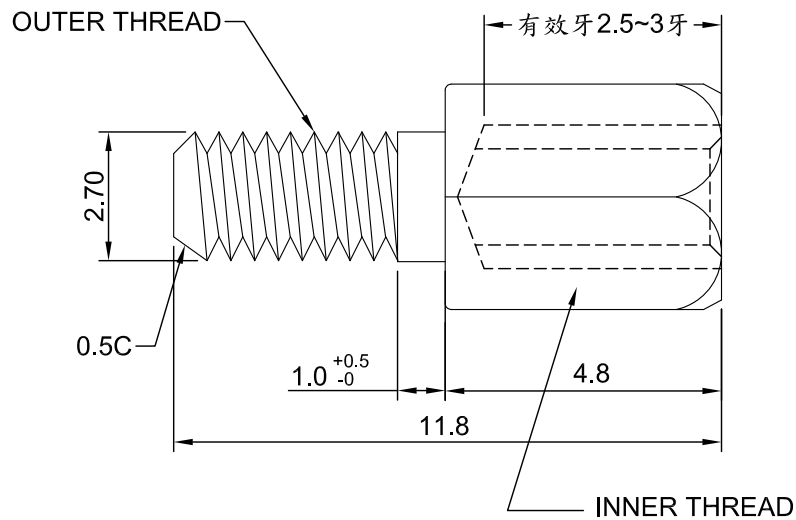

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.05

ANG ± 1°

照片框

ORDER INFORMATION

DR-PSNH-xx-LF
SERIES | | | LEADFREE
| | | 09-37 WAY
| | | HEX SCREW
| | | NUT
| | | SEMI GOLD
| | | MALE

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

DESCRIPTION: D-SUB CONN RIGHT ANGLE , MALE FOOTPRINT : 8.08mm