

Note:

1.Material:



- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 7.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

DR-PxxxNJ-xx-LF
LEADFREE
S :SEMIGOLD FLASH
S30:SEMIGOLD 30u"

RoHS Compliant

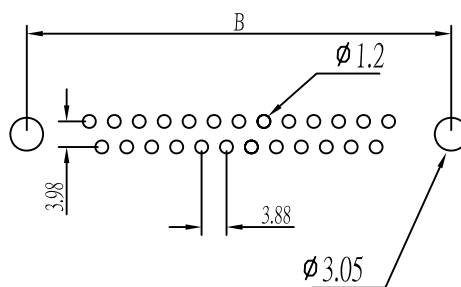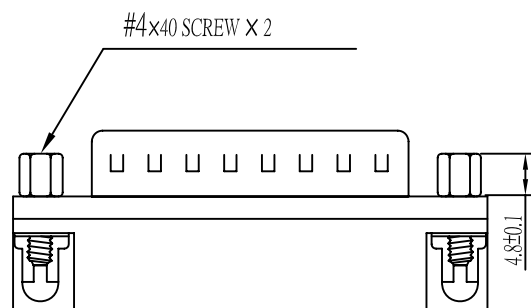

P.C.B. LAYOUT

PART NO.	A±0.25	B±0.2	C±0.2	D±0.2	E±0.2	I±0.1
DR-PxxxNJ-09	30.81	24.99	16.92	8.38	12.55	2.84
DR-PxxxNJ-15	39.25	33.32	25.25	8.38	12.55	2.84
DR-PxxxNJ-25	53.04	47.04	38.96	8.38	12.55	2.84
DR-PxxxNJ-37	69.32	63.50	55.42	8.38	12.55	2.84

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. DR-PxxxNJ-xx

DWG NO. DR-PxxxNJ-xx

APPROVED BY CY

TOLERANCES ARE

DESCRIP TION:

D-SUB RIGHT ANGLE P. B. C TYPE (M)

FILE NO.

DRAWING BY

X. ± 0.3
XX. ± 0.2
XXX. ± 0.1
AWG

AREA

REVISIONS

HK

DATE

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

