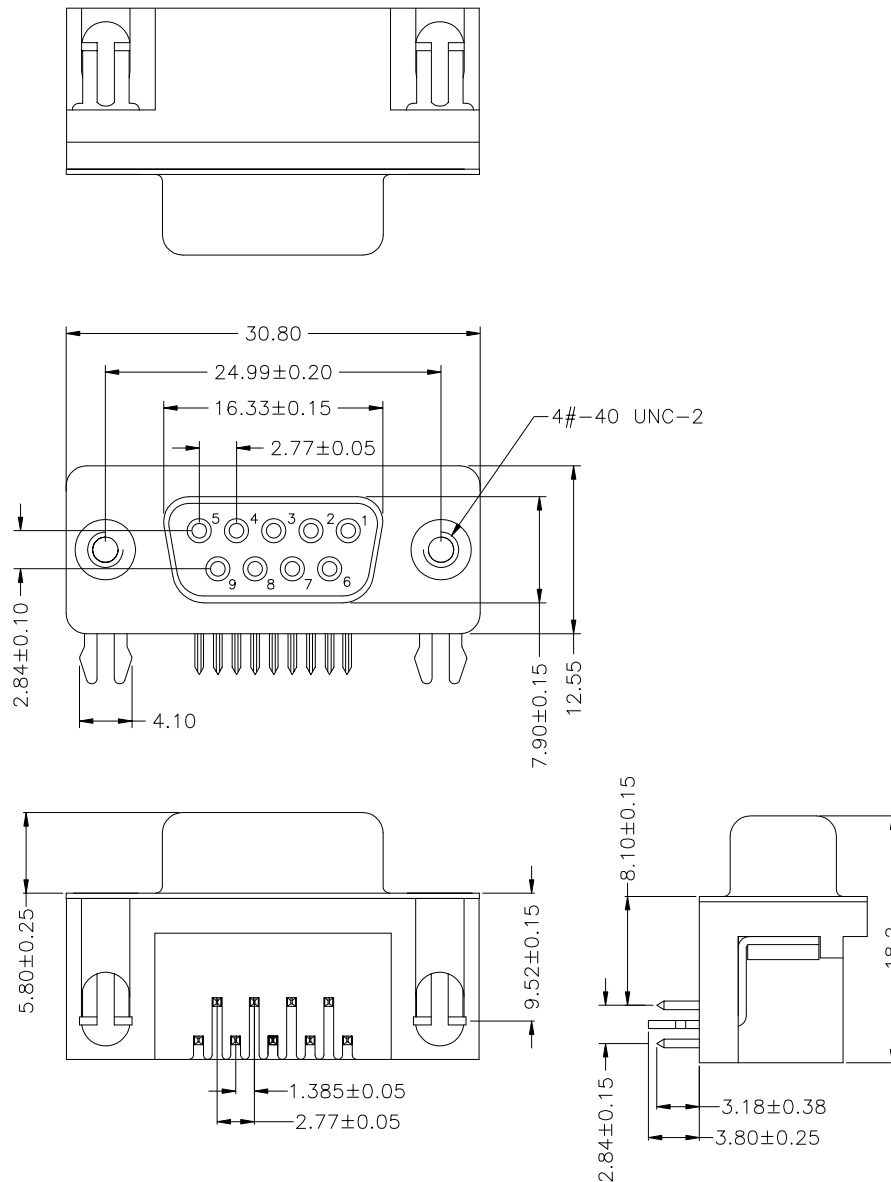


P.C.B. LAYOUT

NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold PLATED OR GOLD/TIN PLATED
- 1.4 Shell:Steel,Nickel plated

2.SPECIFICATION

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 5000M Ω Min. at 500V DC
- 2.3 Dielectric Strength: 1000V Per minute
- 2.4 Operation Temperature: -55°C to+105°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DR-SGN-09-LF
SERIES | NUT | 09 WAY | LEADFREE
FULL GOLD
FEMALE

DESCRIPTION: DR9P-母叉鉚全金黑 8.1