


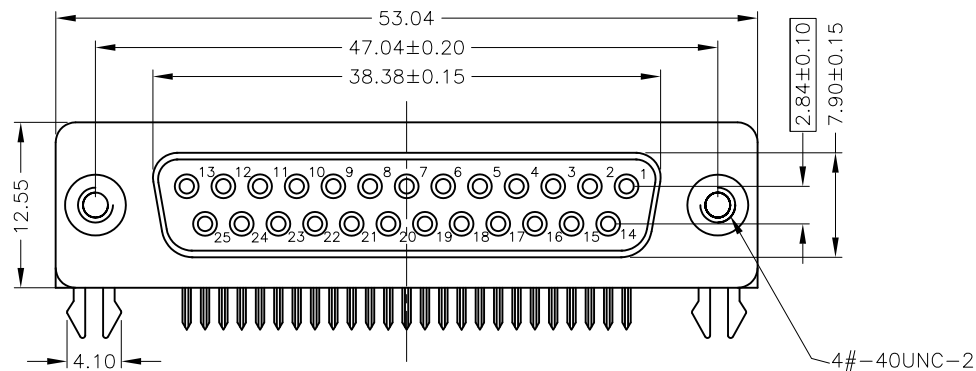

# NOTES:






## 1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold Plated
- 1.4 Shell:Steel,Nickel plated

## 2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000M $\Omega$  Min. at 500V DC
- 2.3 Dielectric Strength:500V AC Per minute
- 2.4 Operation Temperature:-55 $^{\circ}$ C to+105 $^{\circ}$ C
- 2.5 Contact Resistance:30m $\Omega$  Max

## 3.重點尺寸標示 [X X]

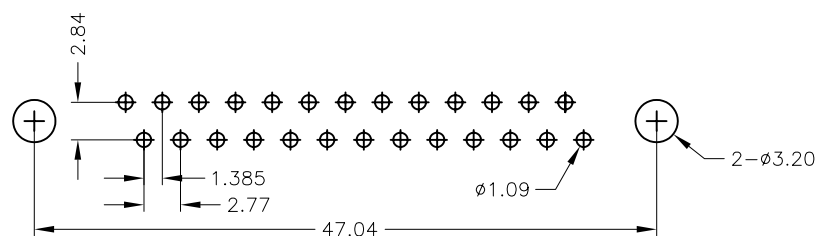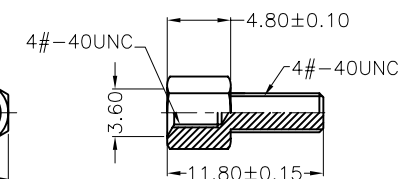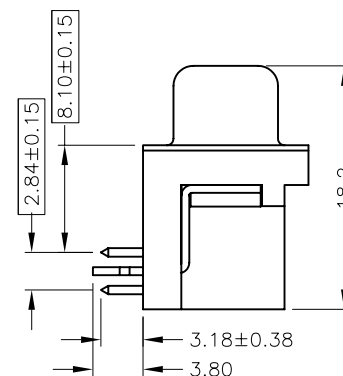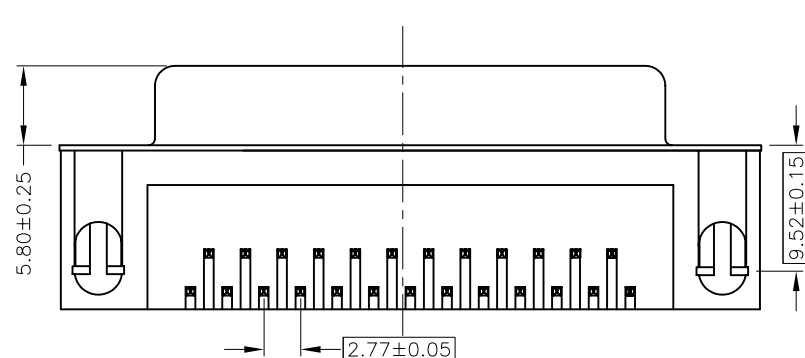

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
.X  $\pm$  0.50  
.XX  $\pm$  0.30  
.XXX  $\pm$   
ANG  $\pm$

PPOJECTION

照片框

## ORDER INFORMATION

DR-SGNH-25-LF  
SERIES T LEADFREE  
25 WAY  
FEMALE HEX SCREW  
NUT  
FULL GOLD

DESCRIPTION: DR25母鉚附全金黑 8.1 簡易型