

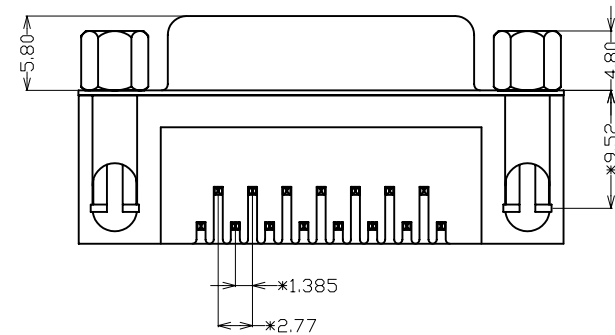


P.C.B. LAYOUT

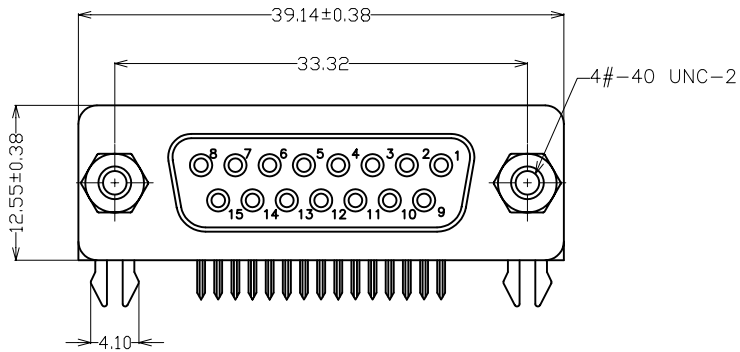

NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass(UL94V-0) BLACK
- 1.2 Contact:Brass 0.64T Gold Plated
- 1.3 Contact:Gold Plated
- 1.4 Shell:Steel,Nickel Plated
- 1.5 Screw, Z Shape Brass Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000M Ω Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55 $^{\circ}$ C to+105 $^{\circ}$ C

"*"標示是重點管控尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DR-SGNJ-15-LF
SERIES | LEADFREE
15 WAY
FEMALE | JACKSCRW
NUT
FULL GOLD

DESCRIPTION: DR15母叉鉚鎖全金黑 8.1 RoHS