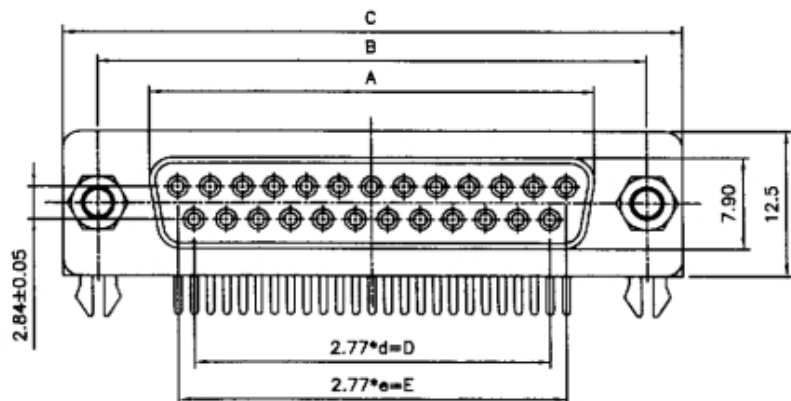


RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: ±0.05mm

POSITION	A	B	C	d	D	e	E
09	16.30	25.00	30.8	03	08.31	04	11.08
15	24.60	33.30	39.2	06	16.62	07	19.39
23	35.30	44.30	50.3	10	27.70	11	30.47
25	38.30	47.10	53.1	11	30.47	12	33.24
37	54.80	63.50	69.4	17	47.09	18	49.86

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u" Tin/Lead (Brighten Tin) or

100u" Tin/Lead Free (Brighten Tin/Matte Tin)

ELECTRICAL

Operation Voltage: 250 VAC max.


Current Rating: 3 Amps max.

Contact Resistance: 15 mohms max.

Insulation Resistance: 3000 Mohms min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / minute

Operating Temperature: -55°C TO +105°C

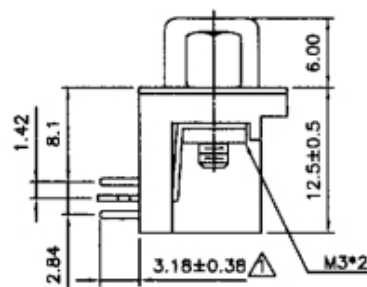

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

DR-SGNJM3-xx-LF

SERIES | | | | LEADFREE

09~37 WAY

FEMALE | | | | JACK SCREW

NUT

FULL GOLD

DESCRIPTION: