
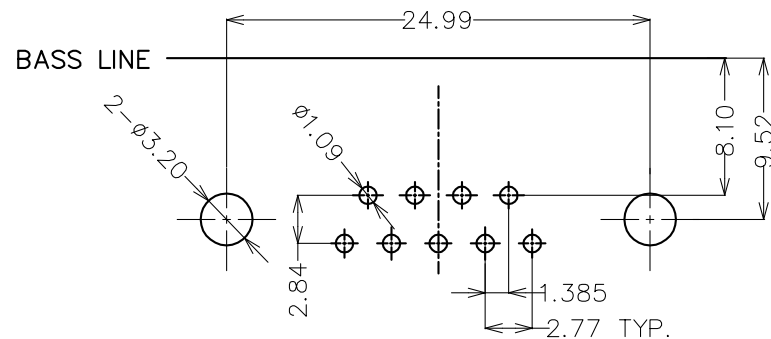
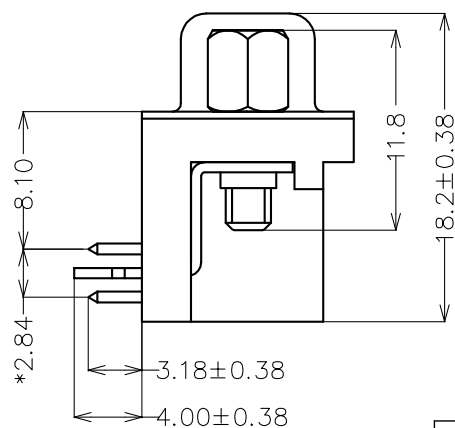
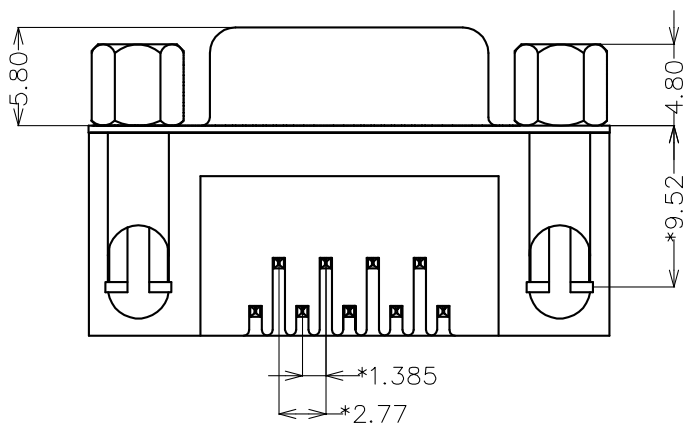


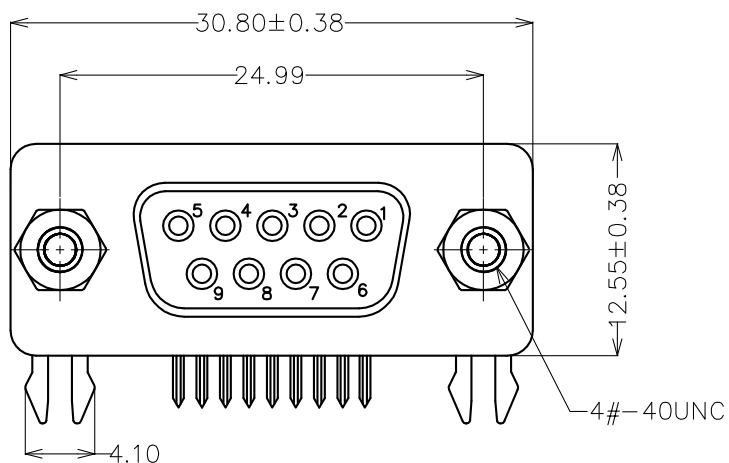

P.C.B. LAYOUT(TOLERANCE±0.05)
TOP VIEW

NOTES:

1.MATERIAL

- 1.1 Insulator: PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold/Tin PLATED
- 1.4 Shell: Spcc, Nickel plated

2.SPECIFICATION

- 2.1 Current Rate: 3 Amps
- 2.2 Insulator Resistance: 1000M Ω Min.
- 2.3 Dielectric Strength: 500V AC Per minute
- 2.4 Operation Temperature: -55 $^{\circ}$ C to +105 $^{\circ}$ C
- 2.5 Contact Resistance: 30m Ω max

"*"標示是重點管控尺寸

PART NO.	CONTACT PLATING	COLOR
DR-SS-09	GOLD/TIN PLATED	BLACK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$ 2 $^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

DR-SS-09-LF
SERIES | LEADFREE
09 WAY
SEMI GOLD
FEMALE

DESCRIPTION: DR9母叉鎖半金黑8.1