


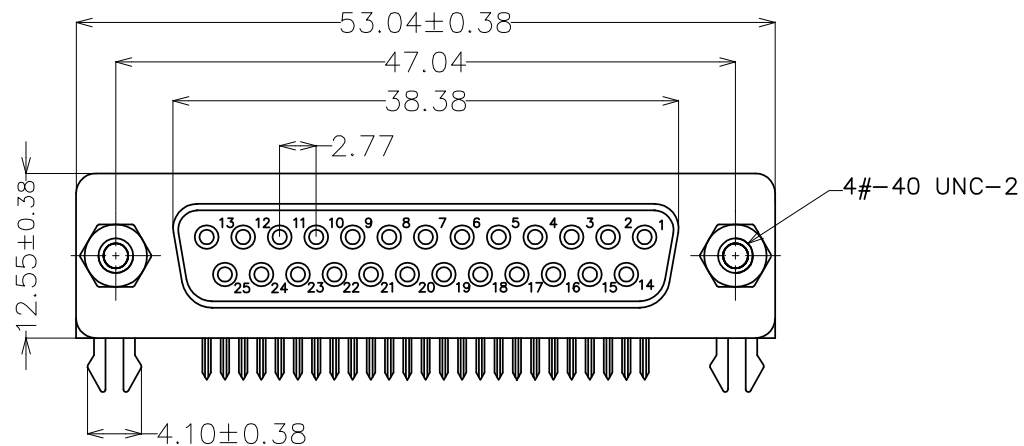




NOTES:

1.MATERIAL

- 1.1 Insulator: PBT+30% Glass Fiber(UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold
- 1.4 Shell: Steel, Nickel plated

2.SPECIFICATION

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 1000MΩ Min. at 500V DC
- 2.3 Dielectric Strength: 500V Per minute
- 2.4 Operation Temperature: -55°C to +105°C

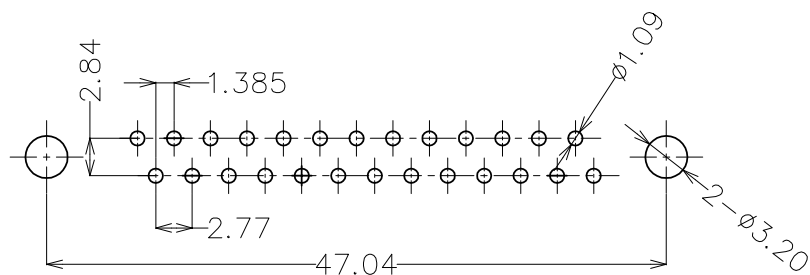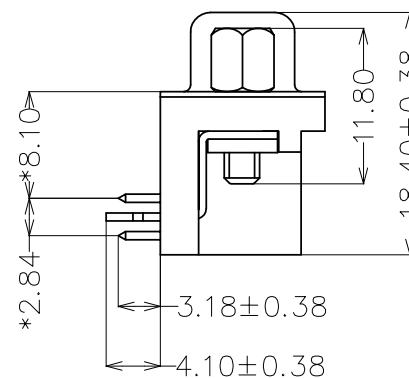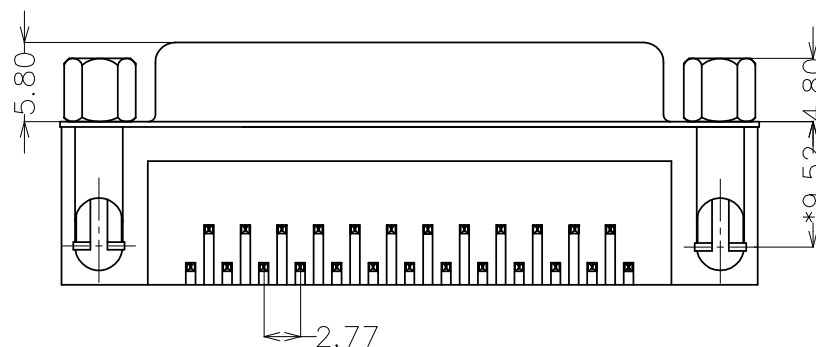

P.C.B. LAYOUT(TOLERANCE±0.05)
P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DR-SSNJ25-LF
SERIES 25 WAY JACKSCREW NUT SEMI GOLD FEMALE LEADFREE

DESCRIPTION: DR25母叉鉚鎖 8.1 RoHS