

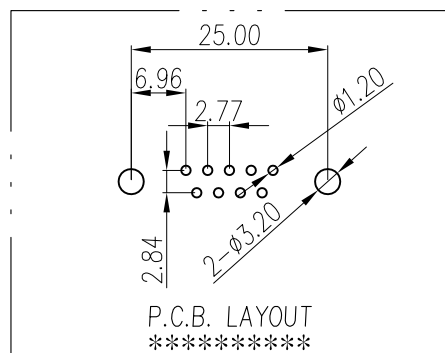
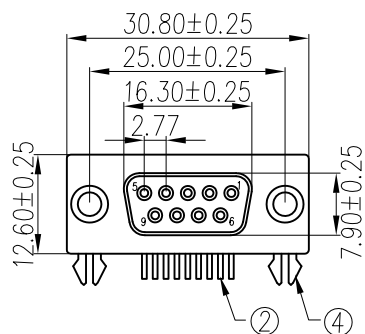
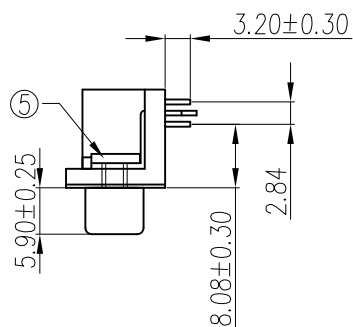


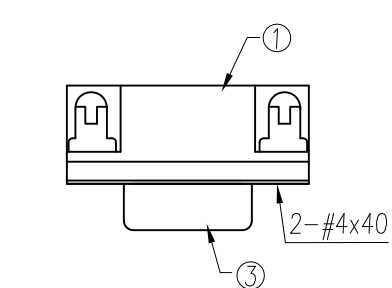

Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Mating force: 5.5 Kgf Max.
6. Unmating force: 1.7 Kgf Min.
7. Temperature range: -55°C~+105°C



| STANDARD | N | NJ |
|----------|---|----|
| ⑥        |   | ⑥  |

|     |                     |      |                   |                     |                                                                                                                               |
|-----|---------------------|------|-------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------|
| 6   | Screw               | 2    | Brass             | 4.75*11.80mm        | 80u"min. Nickel Plated                                                                                                        |
| 5   | Rivated             | 2    | Brass             | 5.4*5.1mm           | 80u"min. Nickel Plated                                                                                                        |
| 4   | "Z" type board-lock | 2    | Steel             | T=0.60mm            | 80u"min. Tin Plated                                                                                                           |
| 3   | Front-shell         | 1    | Cold rolled steel | T=0.35mm            | 80u"min. Nickel/Tin Plated                                                                                                    |
| 2   | Contact             | 9    | Brass             | T=0.20mm            | Contact area:0.8u"min. Gold Plated over 40u"Nickel min.<br>Solder area:80u"min. Tin Plated over 40u"Nickel min.<br>(All Gold) |
| 1   | Housing             | 2    | P.B.T             | UL 94-V0            | Black/Blue/White                                                                                                              |
| No. | Name                | Q'ty | Material          | Remarks & Thickness | Finish                                                                                                                        |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

照片框

ORDER INFORMATION

DR-SSxx-09-LF

SERIES  
LEADFREE  
09 WAY  
BLANK:STANDARD  
N:NUT  
NJ:NUT+JACKSEW  
SEMI GOLD

DESCRIPTION: D-SUB RIGHT ANGLE P.C.B TYPE 9PIN(F)