


SPECIFICATION
CURRENT RATING : 1AMP.
INSULATOR RESISTANCE 5000M Ω MIN. AT DC 500V.
CONTACT RESISTANCE : 20M Ω MAX. AT DC 100mA.
OPERATING TEMPERATURE : -65°C ~ +125°C.
MAX PROCESSING TEMPERATURE: 260 $\pm$ 10°C FOR 3~5 SECONDS.

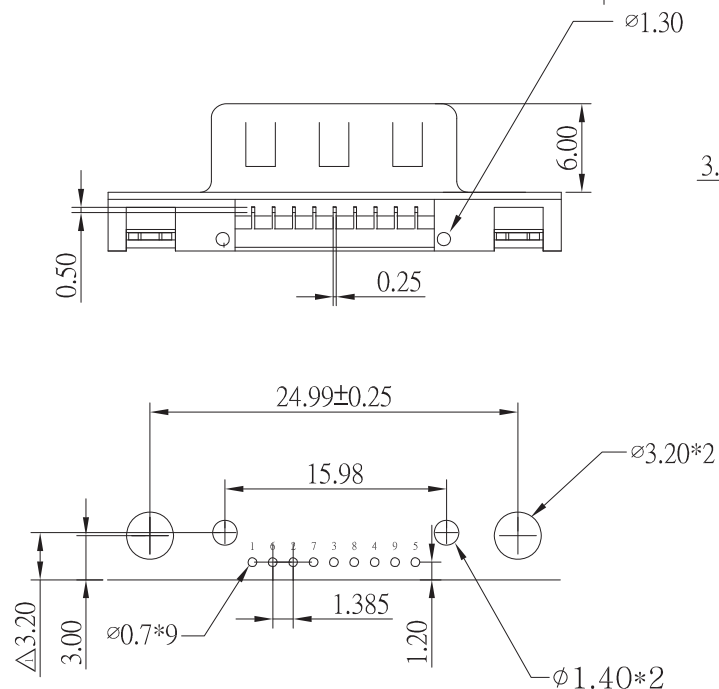

照片框

DR12-PNZ1-09-LF
SERIES NUT CLIP 09 LEADFREE
MALE WAY

DESCRIPTION: D-SUB CONNECTOR SLIM DIP TYPE (1.20mm) 09 MALE

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

ANG $\pm 3^\circ$

ANG $\pm 3^\circ$

ON 

PPOJECTION 

煜倫股份有限公司

www.morethanall.com