

MATERIALS
 Contact :Brass,
 Nickel-Undercoated, Selective Gold-Plated
 Insulator:NYLON 9T, BLACK.



Shell :Steel,Copper-Undercoated, Nickel
 Plated.

CHARACTERISTICS
 Current Rating :3 Amps
 Insulation Resistance :5000MΩ Min.at DC 500V
 Contact Resistance :20mΩ Max. at DC 100mA
 Temperature Range :-65°C ~ +125°C
 Max Processing Temperature:285°C~290°C

DR14-SNH-09-LF
 LEADFREE

RoHS Compliant

*P.C.B. LAYOUT

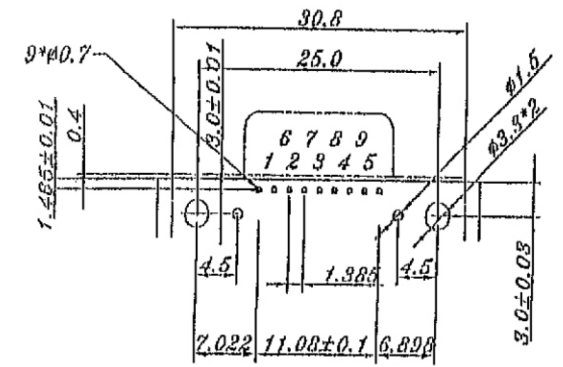

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

PART NO. DR14-SNH-09

DWG NO. DR14-SNH-09

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

DESCRIP TION:			
AREA	REVISIONS	HK	DATE