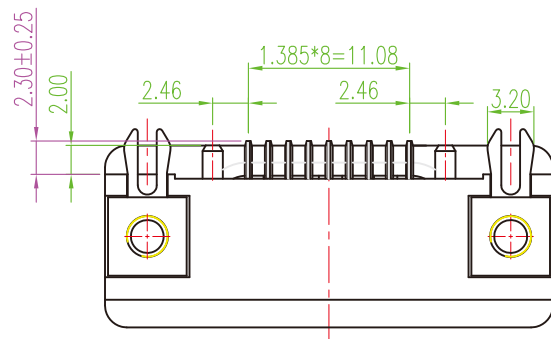
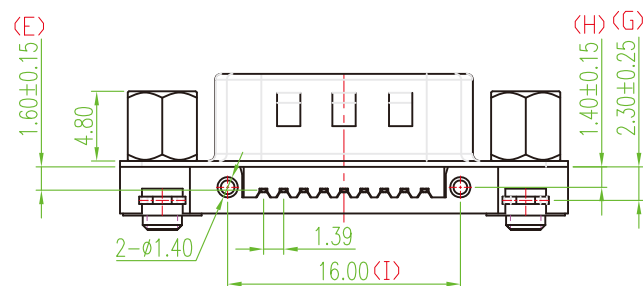
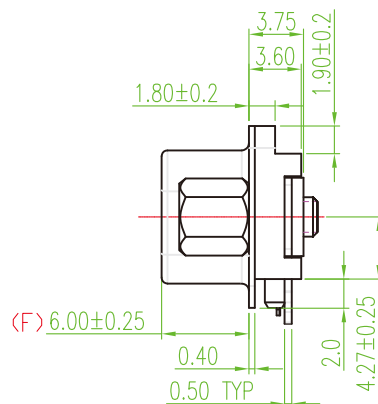
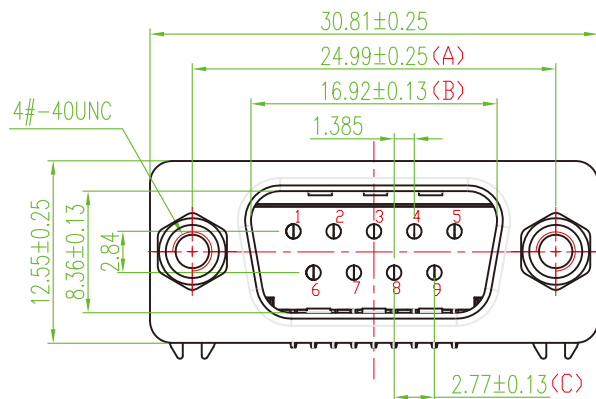


RECOMMENDED P.C.B. LAYOUT

NOTES

- MATERIAL:**
Housing: PA9T, UL 94V-0, Color: Black.
Terminal: Copper Alloy.
Shell: SPCC.
Boardlock: Copper Alloy.
Rivet: Copper Alloy.
Screw: Copper Alloy.
- FINISH:**
Terminal: Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Area.
Shell: Nickel Plated.
Boardlock: Tin Plated.
Rivet: Nickel Plated.
Screw: Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance

SPECIFICATIONS

- VGA
 - Operation Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000 VAC(RMS)
 - Total Mating Force: 4.0 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -55°C to +85°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ± 0.25
.XXX ± 0.13
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DR15-PNJ-09-LF

SERIES | LEADFREE
09 WAY
JACKSCREW
NUT
MALE

DESCRIPTION: D-SUB 09 MALE CONNECTOR SLIM DIP TYPE