


- NOTES:
- MATERIAL:
 HOUSING : HIGH TEMP PLASTIC UL94V-0, BLACK COLOR
 CONTACTS : BRASS
 REAR COVER : THERMOPLASTIC OR HIGH TEMP PLASTIC UL94V-0, BLACK COLOR
 BOARD LOCK : BRASS
 SQUARE SCREW : BRASS
 SHELL : STEEL
 - FINISH :
 CONTACT : GOLD FLASH PLATED ON CONTACT AREA
 100u" TIN PLATING ON SOLDERTAILS
 NICKEL UNDERPLATED OVERALL
 BOARD LOCK : 60u" TIN PLATING, 50u"MIN NICKEL UNDERPLATING
 SQUARE SCREW : NICKEL PLATING
 SHELL : NICKEL PLATING
 - RECOMMENDED PCB THICKNESS : 1.0mm
 - SCREW OF TORQUE : 5 kg-cm MAX.



DR16-SN-25-LF
LEADFREE

RoHS Compliant

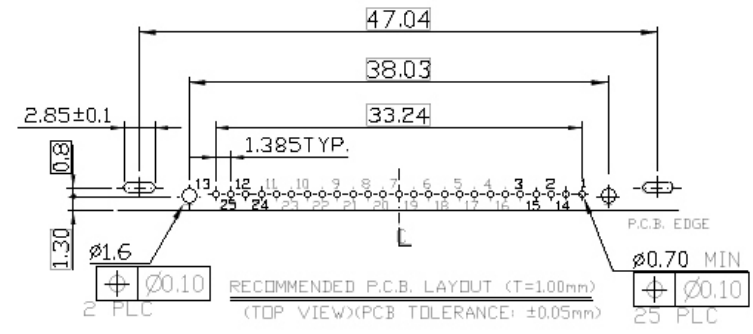

PART NO. DR16-SN-25	
DWG NO. DR16-SN-25	
FILE NO.	
UNIT / mm	SCALE 1:1

CHECKED BY CY	DRAWING BY
DRAWING BY	
PROJECTION	

TOLERANCES ARE
.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:				
AREA	REVISIONS	HK	DATE	

煜倫股份有限公司