
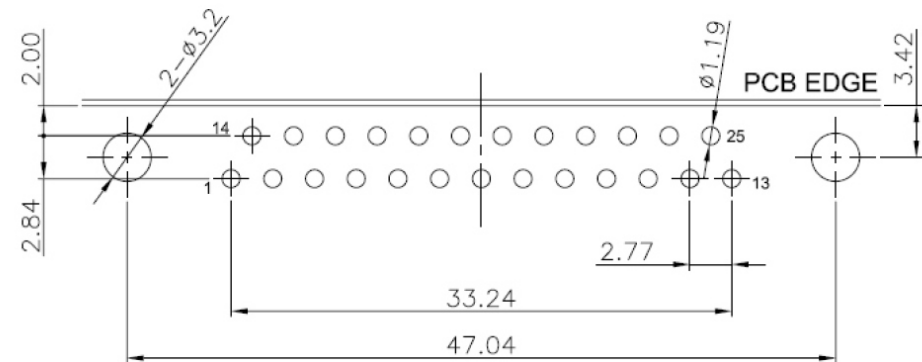


**MATERIAL:**

INSULATOR : PBT+30% GLASS FIBER (UL 94V-0) .  
 CONTACT : COPPER ALLOY  
 CONTACT FINISH : GOLD OVER NICKEL  
 SHELL : STEEL ,NICKEL PLATED  
 BOARDLOCK : BRASS,TIN PLATED  
 RIVETED INSERT : BRASS,NICKEL PLATED

**SPECIFICATION:**

CURRENT RATING : 5 AMP  
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE  
 INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.  
 CONTACT RESISTANCE : 15mΩ MAX.  
 OPERATING TEMPERATURE : -55°C ~ +105°C.

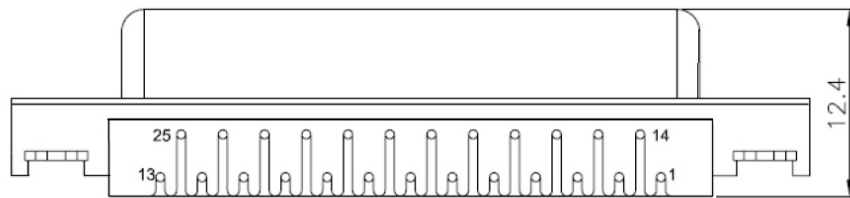

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DR20-PN-25-LF  
 SERIES | LEADFREE  
 | 25 WAY  
 NUT  
 MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: