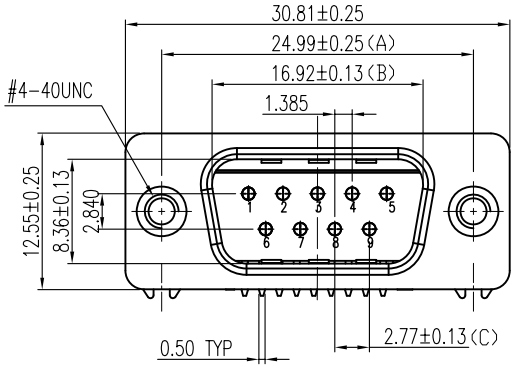

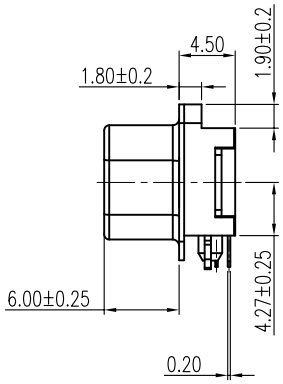

SPECIFICATIONS

1. D-SUB
1.1 Voltage: 250 VAC(RMS) Max.
1.2 Current Rating: 3 Ampere per Contact
1.3 Contact Resistance: 25 Milliohms Max.
1.4 Insulation Resistance: 1000 Megohms Min.
1.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
1.6 Total Mating Force: 4.0 Kgf Max.
1.7 Total Unmating Force: 1.0 Kgf Min.
1.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
Housing:PBT, UL 94V-0, Color: Black
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Rivet:Copper Alloy.
Screw:Copper Alloy.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
Screw:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

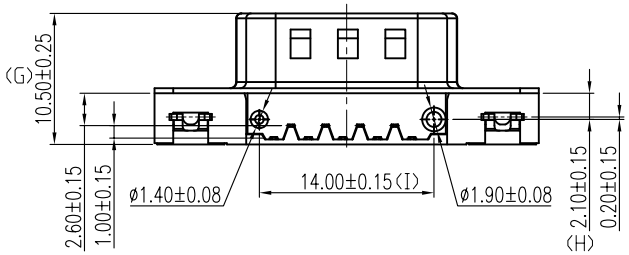

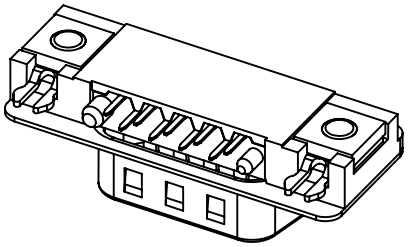

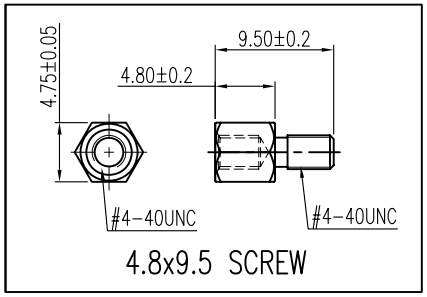

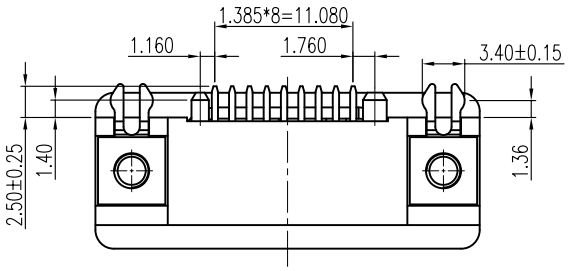

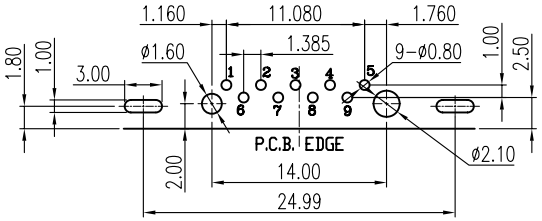

RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(I)

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
DATE		.XX ± 0.25
		.XXX ± 0.13
		ANG ± 2°
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

DR25-PNH-09-LF
SERIES
NUT
MALE
HEX SCREW
09WAY
LEADFREE

DESCRIPTION: SLIM D-SUB 9 MALE CONNECTOR DIP SOLDER, RIGH ANGLE