



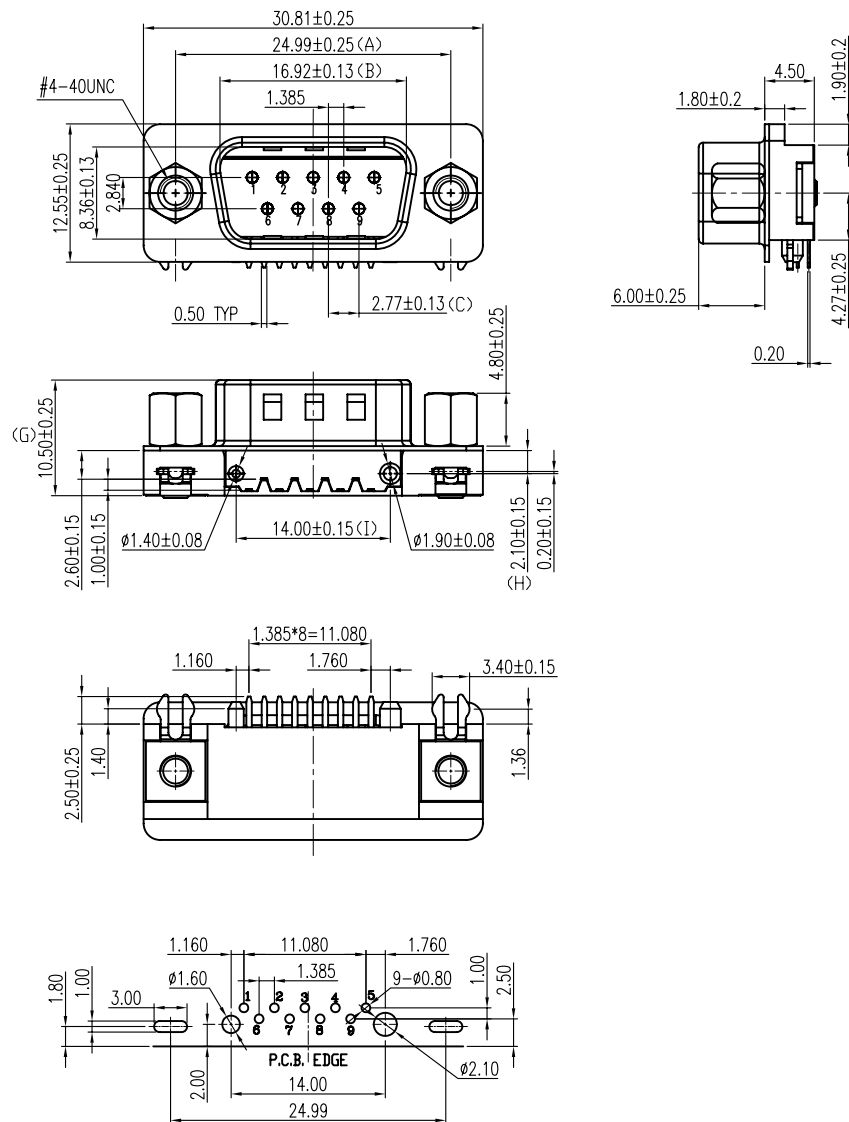

RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION: (A)~(I)



SPECIFICATIONS

- D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to $+85^{\circ}\text{C}$

NOTES

- MATERIAL:
 - Housing: PBT, UL 94V-0, Color: Black
 - Terminal: Copper Alloy.
 - Shell: SPCC.
 - Boardlock: Copper Alloy.
 - Rivet: Copper Alloy.
 - Screw: Copper Alloy.
- FINISH:
 - Terminal: Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Area.
 - Shell: Nickel Plated.
 - Boardlock: Tin Plated.
 - Rivet: Nickel Plated.
 - Screw: Nickel Plated.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX ± 0.25
.XXX ± 0.13
ANG $\pm 2^{\circ}$

照片框

ORDER INFORMATION

DR25-PNJ-09-LF

SERIES | LEADFREE
09 WAY
JACKSCREW
NUT
MALE

DESCRIPTION: SLIM D-SUB 9 MALE CONNECTOR DIP SOLDER, RIGH ANGLE