


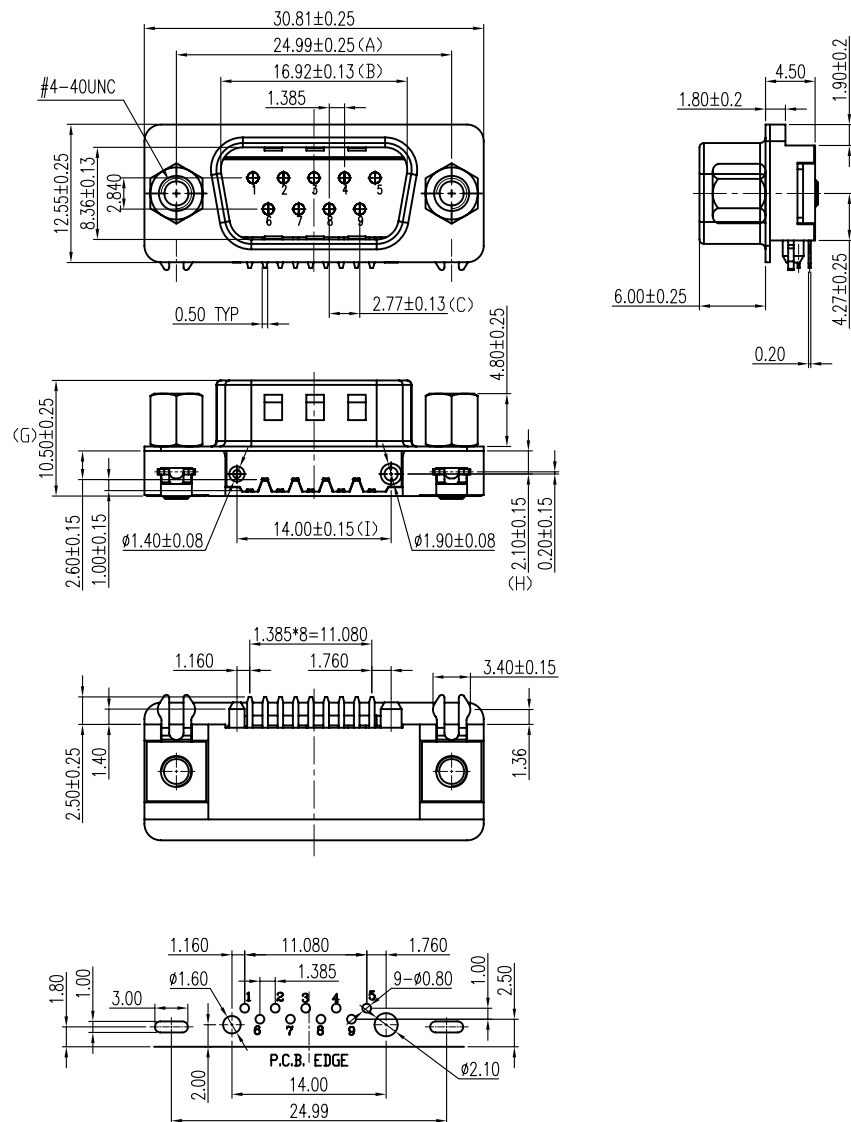

RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(I)

SPECIFICATIONS

1. D-SUB

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C


NOTES

1. MATERIAL:

- Housing:PBT, UL 94V-0, Color: Green
- Terminal:Copper Alloy.
- Shell:SPCC.
- Boardlock:Copper Alloy.
- Rivet:Copper Alloy.
- Screw:Copper Alloy.

2. FINISH:

- Terminal:Gold Plated over Nickel at Contact Area.
- Tin Plated over Nickel at Solder Ared.
- Shell:Nickel Plated.
- Boardlock:Tin Plated.
- Rivet:Nickel Plated.
- Screw:Nickel Plated.

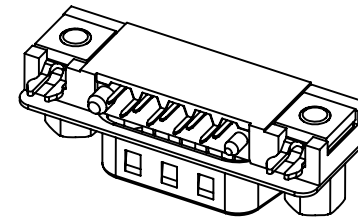

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ± 0.25
.XXX ± 0.13
ANG ± 2°



ORDER INFORMATION

DR25-PNJGR-09-LF

SERIES T T T LEADFREE
09 WAY
GREEN
JACKSCREW
NUT
MALE

DESCRIPTION: SLIM D-SUB 9 MALE CONNECTOR DIP SOLDER, RIGH ANGLE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com