


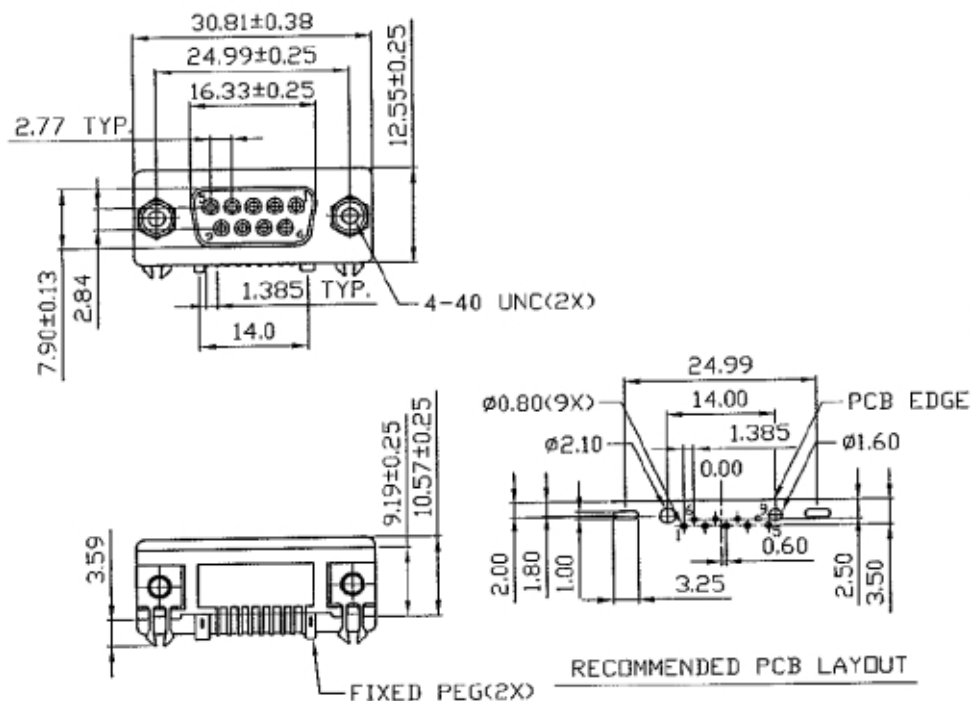

NOTE:

1.MATERIAL:

HOUSING:PBT,30% GLASS FILLED,UL94-V0

COLOR:BLACK

TERMINAL:0.25mm THICKNESS,PHOSPHOR BRONZE C5191H

METAL SHELL:0.40mm THICKNESS,SPCC

BOARD LOCK & NUT & SCREW:BRASS

2.PLATING:

TERMINAL:

CONTACT AREA:SELECTIVE GOLD(Au) PLATING

SOLDER TAIL:ROHS:TIN(Sn),THICKNESS=100 MICROINCH MIN./2.54 MICROMETER MIN.

N/A:TIN-LEAD(Sn-Pb),THICKNESS=75 MICROINCH MIN./1.905 MICROMETER MIN.

UNDER PLATE:NICKEL(NI),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

METAL SHELL:



TIN(Sn),THICKNESS=100 MICROINCH MIN./2.54 MICROMETER MIN.

UNDER PLATE:COPPER(Cu),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

BOARD LOCK:TIN(Sn),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

NUT & SCREW:NICKEL(NI),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

3.RECOMMENDED PCB THICKNESS:1.60+/-0.05mm

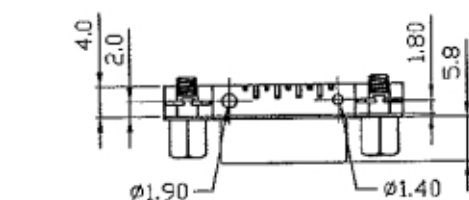

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DR25-SNJ-09-LF

SERIES T T LEADFREE
09 WAY
JACKSCREW
NUT
FEMALE

DESCRIPTION: