




NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold or Tin Plated
- 1.4 Shell:Steel,Nickel Plated
- 1.5 Screw:Brass, Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:5000MΩ Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55°C to+105°C

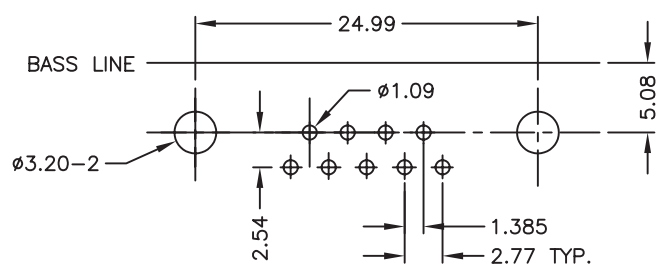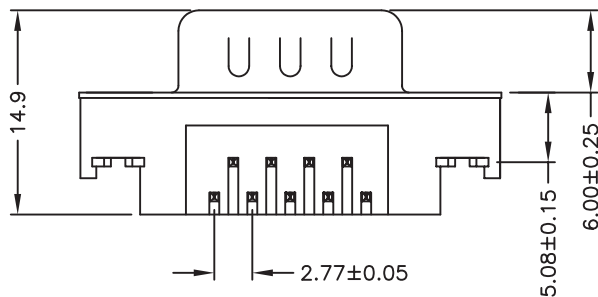

P.C.B. LAYOUT

DR50-PNH-09-LF
LEADFREE
RoHS Compliant



PART NO. DR50-PNH-09

DWG NO. DR50-PNH-09

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION: DR9公鉚附全金黑 5.08 無毒

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE