
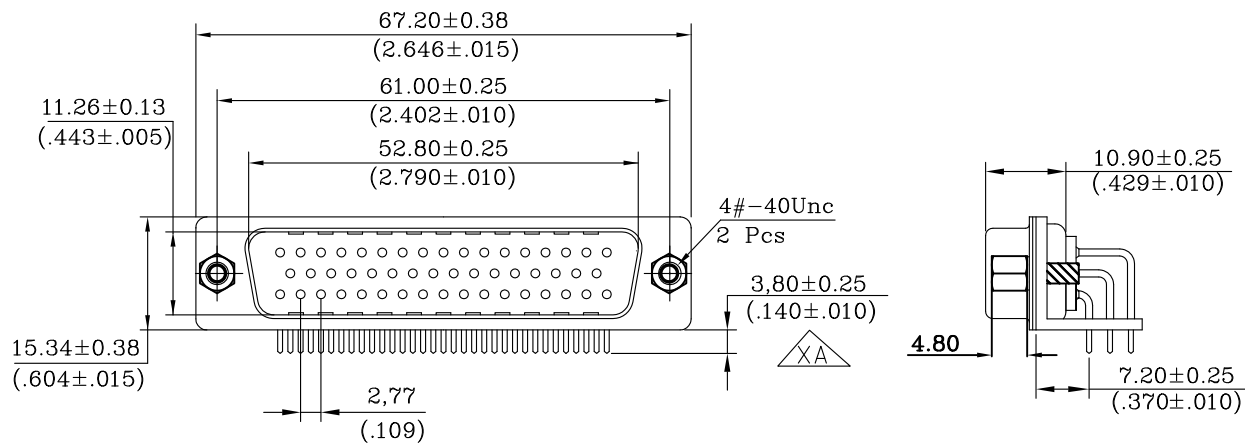


Recommend PCB. Layout

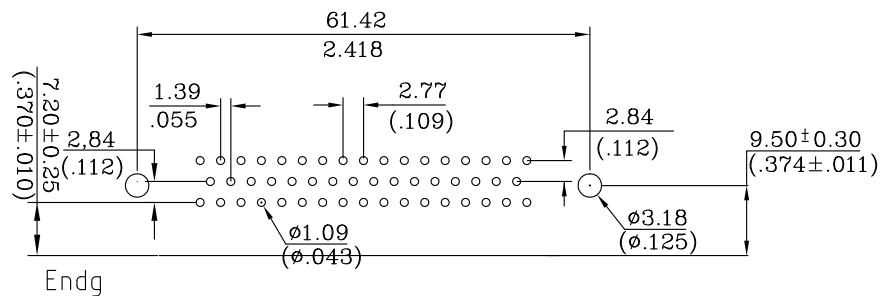

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 5Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000Megohms Min.
 Contact Resistance: 75Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material

Shell : SPCC.
 Insulator : PBT .
 Contact : Copper Alloy.
 L-Piece : SPCC (Nickel).
 Screw : Copper Alloy.

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DR72-PLJ-50-LF

SERIES
 LEADFREE
 50 WAY
 JACKSCREW
 L TYPE
 MALE

DESCRIPTION: