


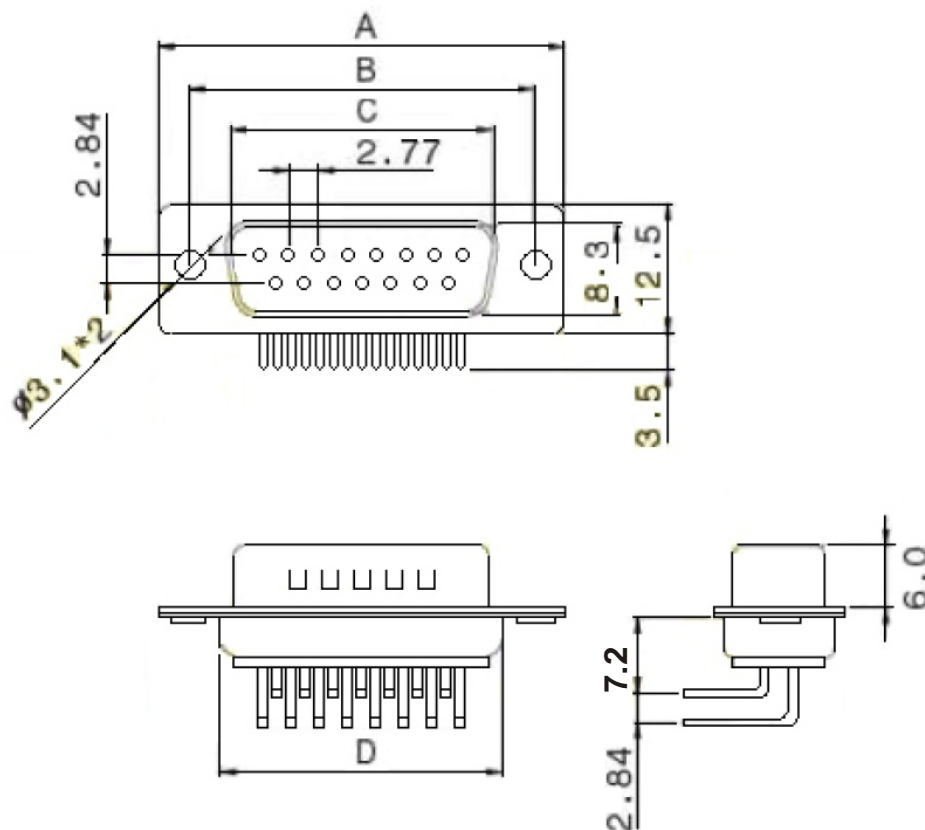


POSITION	A	B	C	D
9	30.8	25.00	16.92	19.2
15	39.2	33.30	25.25	27.7
19	44.8	38.86	30.60	32.8
23	50.3	44.30	35.90	38.3
25	53.1	47.10	38.96	41.1
37	69.4	63.50	55.42	57.3

MATERIAL

Insulator :PBT+30% Glass Fiber (UL94V-0)
 Contact :Phosphor Bronze or Brass (Standard is Brass)
 Contact Plated:Gold over Nickel
 Shell :Steel,Zinc plated or Tin plated

SPECIFICATION

Current Rate :5 Amps
 Insulation Resistance :1000M Ω Min. at 500V DC
 Contact Resistance :20M Ω Max.
 Dielectric Strength :500V per minute
 Operation Temperature:-40°C to + 105°C

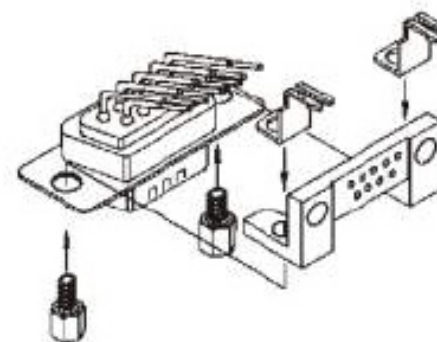

WITH BRACKET + BOARDLOCK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 X, $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

DR72-PZJ-xx-LF
 SERIES LEADFREE
 09-37 WAY
 JACKSCREW
 CLIP
 MALE

DESCRIPTION: