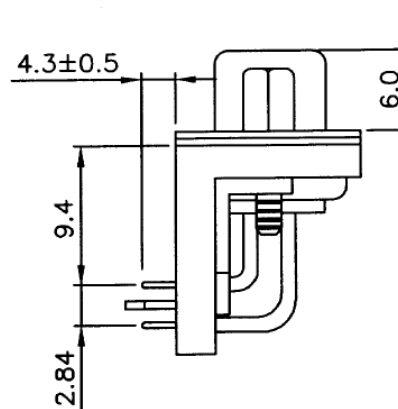
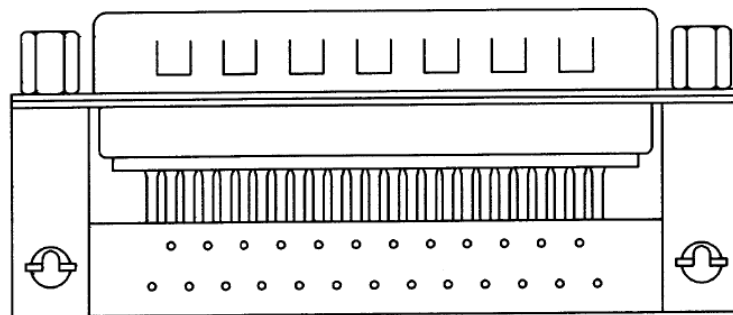
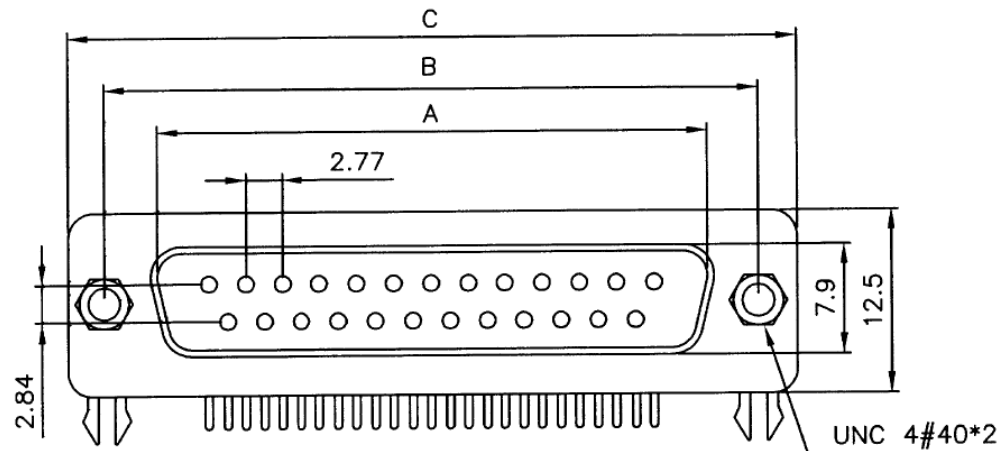


RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: ±0.05mm

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50μ" Nickel

Contact Area: 1μ"~30μ" Gold Flash

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating: 3 Amps Max.

Contact Resistance: 15 mohms Max.

Insulation Resistance: 3000 Mohms Min. @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / minute

Operating Temperature: -55°C to +105°C

POSITION	A	B	C
9	16.92	25.00	30.8
15	25.25	33.30	39.2
19	30.60	38.86	44.8
23	35.90	44.30	50.3
25	38.96	47.10	53.1
37	55.42	63.50	69.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DR94-PZJ-xx-LF

SERIES T LEADFREE
09~37 WAY
JACK SCREW
CLIP
MALE

DESCRIPTION: