
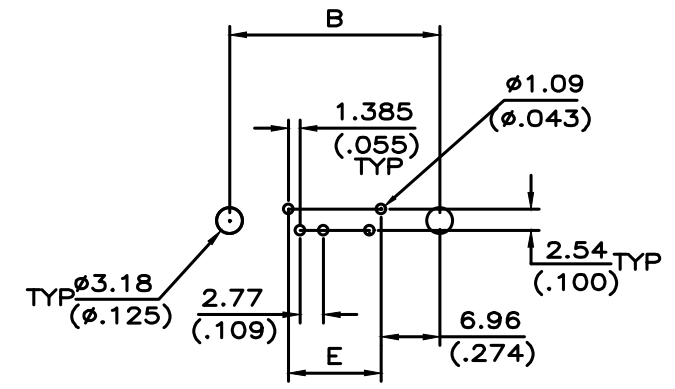
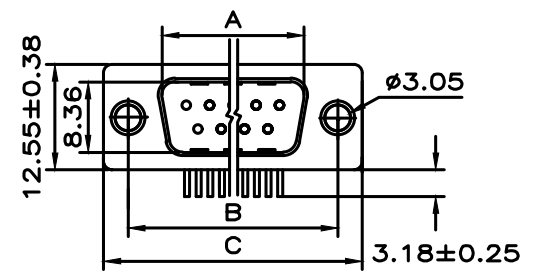


Table 1 Material	
Contact	Brass
Metal Shell	Steel/Dimples on Plug only
Insulator	UL94V-0 Thermoplastic 30% glass filled

Table 2 Finish	
Contact	Gold-flashed
Metal Shell	Tin or nickel plated

Table 3 Electrical Data	
Operating Temperature	-55°C - +125°C
Insulator Resistance	Minimum 5000 MΩ
Contact Resistance	Maximum 10mΩ
Dielectric w/standing Volt	1000 V AC per min

Table 4 Dimension					
No. of Contact	A ±0.25 ±.010	B ±0.13 ±.005	C ±0.38 ±.015	D ±0.25 ±.010	E ±0.25 ±.010
09	16.92 .666	24.99 .984	30.81 1.213	19.28 .759	11.08 .436
15	25.25 .994	33.32 1.312	39.14 1.541	27.51 1.083	19.39 .763
25	38.96 1.534	47.04 1.852	53.04 2.088	41.28 1.625	33.24 1.310
37	55.42 2.182	63.50 2.500	69.32 2.729	57.71 2.272	49.86 1.963

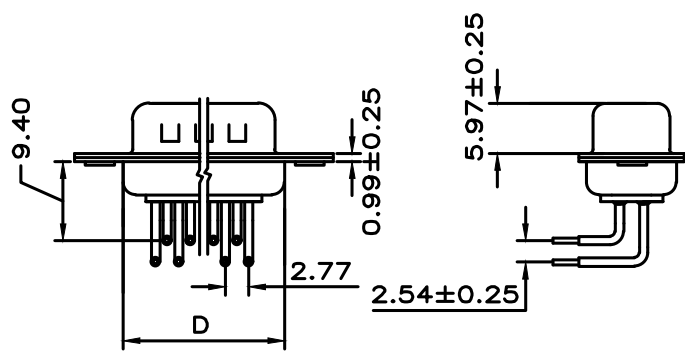

P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.30

CHECKED BY GENIUS

.XX ±

UNIT / mm

SCALE 1:1

.XXX ±

DATE

ANG ± 2°

SIZE A4

PROJECTION

煜倫股份有限公司

www.morethanall.com

照片框

ORDER INFORMATION

DR941-P-xx-LF

SERIES | LEADFREE

09-37WAY

MALE

DESCRIPTION: