
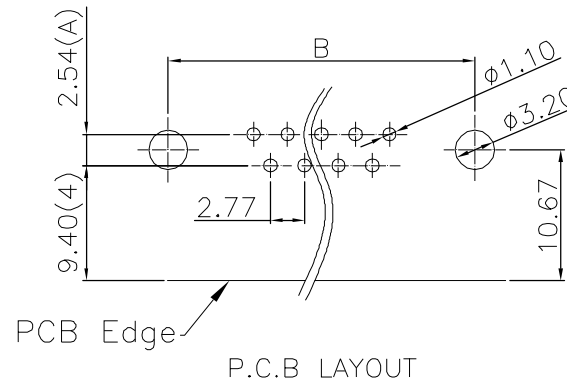
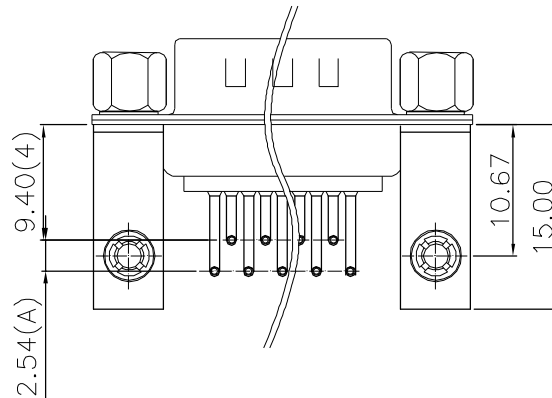



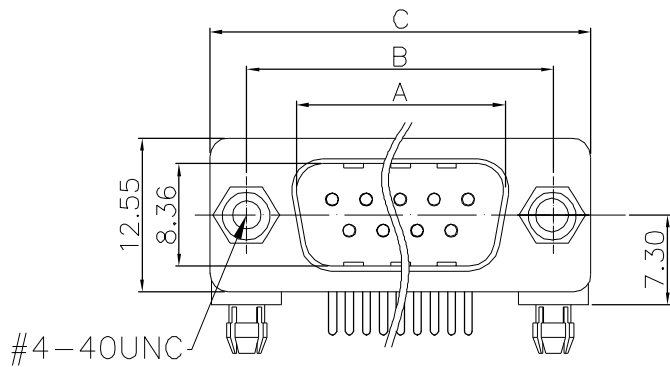

1. Materials And Finish

Shell: Steel, Front Shell Tin Finished
Back Shell Tin Finished
Dimples On Plug Only

Insulator: PBT+ 30% Glass Filled, UL 94V-0, BLACK

Contact: Copper Alloy, Full Gold Flash

2. Specification

Contact Current Rating: 5.0 A

Contact Resistance: 10 mΩ Max.

Dielectric Withstanding Voltage: 1000 V AC Min.

Insulation Resistance: 5GΩ Min.

Temperature Rating: -55°C ~ +125°C

No	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DR941-PZNJ-xx-LF

SERIES
LEADFREE
09~37 WAY
JACKSCREW
MALE NUT CLIP

DESCRIPTION: D-SUB 90°, Male, L Piece, 9.4 mm, Machine Pin