

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:5 Amperes.

Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.

Insulation Resistance:5000 Medohms Minimum

Contact Resistance:25 Milliohms Maximum.

Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.

Contact Separation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.


Insulator: PBT UL 94V-0 Rated.

Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.

Shell:Nickel Plated.

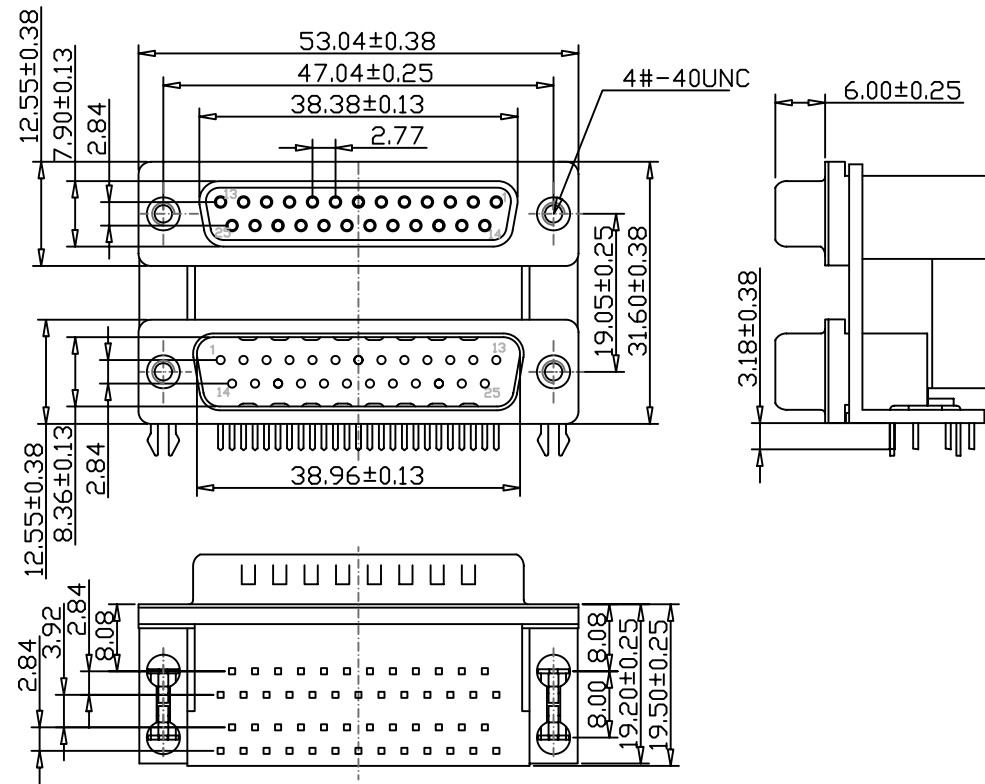

RECOMMENDED P.C.B LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PPOJECTION

ORDER INFORMATION

DRB1-AN19-2525-LF

SERIES

LEADFREE

25 TO 25 WAY

SPACING 19.05mm

NUT

FEMALE TO MALE

DESCRIPTION: D-SUB CONNECTOR 25 FEMALE/25 MALE DUAL PORT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com